




# CB1

1200 x 800 x 740 mm / 470 l

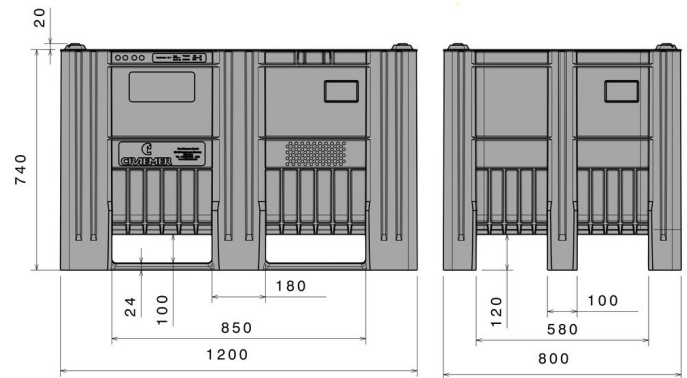

Art.-Nr.: 83381300

## Technical data

|                           |                                                                                                                     |                                                                                                                       |                                                                                                                   |
|---------------------------|---------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Dimensions L x W x H (mm) | 1200 x 800 x 740                                                                                                    |                                                                                                                       |                                                                                                                   |
| Weight(kg)                | 34.5 kg                                                                                                             |                                                                                                                       |                                                                                                                   |
| Volume (l)                | 470 l                                                                                                               |                                                                                                                       |                                                                                                                   |
| Material                  | PE                                                                                                                  |                                                                                                                       |                                                                                                                   |
| Load capacity (kg)        |  <b>Stacking Load</b><br>5000 kg |  <b>Holding Capacity</b><br>700 kg |  <b>Dynamic Load</b><br>1200 |

## Characteristics

Colour: light blue  
 Manufactured in one piece  
 Runners: 3, unwelded  
 Stackable  
 Temperature stability: -30 °C to +40 °C, briefly up to +90 °C  
 Resistant to most chemicals and cleaning agents  
 Food-safe. HACCP compliant  
 Container is based on DIN EN 13626 and DIN EN ISO 12048

## Options



Transponder (RFID)  
 Lid

## Loading quantities (Pcs / Approximate amount)

|                                                                                                     |                                              |                                                                                               |
|-----------------------------------------------------------------------------------------------------|----------------------------------------------|-----------------------------------------------------------------------------------------------|
|  <b>Container</b> | Container 20': <b>33</b><br>Container 40': – | Container 40' High Cube: <b>75</b><br>Conventional trailer 45' high cube container: <b>99</b> |
|  <b>Truck</b>     | MEGA-Trailer: <b>99</b>                      | Jumbo: <b>114</b>                                                                             |

## Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.



\*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

\*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

\*3 **Stacking Load:** With a maximum stacking height of 6 boxes (5 on 1 stacking) and evenly distributed load at approx. 20 °C.  
**Dynamic Load:** On a forklift with an evenly distributed load at a room temperature of approx. 20 °C.