






CB1

1200 x 800 x 740 mm / 470 l

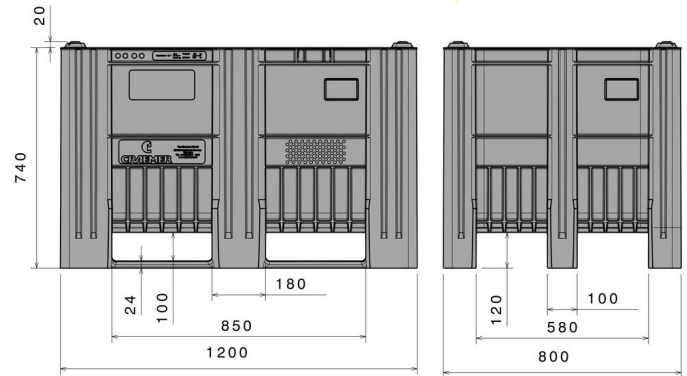

Art.-Nr.: 83381910

Technical data			
Dimensions L x W x H (mm)	1200 x 800 x 740		
Weight (kg)	34.5 kg		
Volume (l)	470 l		
Material	PE		
Load capacity (kg)	kg  Stacking Load 5000 kg	kg  Holding Capacity 700 kg	kg  Dynamic Load 1200
Characteristics		Options	
Colour: red		Transponder (RFID)	
Manufactured in one piece		Lid	
Runners: 3, unwelded			
Stackable			
Temperature stability: -30 °C to +40 °C, briefly up to +90 °C			
Resistant to most chemicals and cleaning agents			
Food-safe. HACCP compliant			
Container is based on DIN EN 13626 and DIN EN ISO 12048			
Loading quantities (Pcs / Approximate amount)			
 Container	Container 20': 33 Container 40': –	Container 40' High Cube: 75 Conventional trailer 45' high cube container: 99	
 Truck	MEGA-Trailer: 99	Jumbo: 114	
Labelling			
Customised printing and numbering available on request depending on quantity. Position upon consultation.			



*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

*3 **Stacking Load:** With a maximum stacking height of 6 boxes (5 on 1 stacking) and evenly distributed load at approx. 20 °C.
Dynamic Load: On a forklift with an evenly distributed load at a room temperature of approx. 20 °C.