




CB3

1200 x 1000 x 740 mm / 610 l

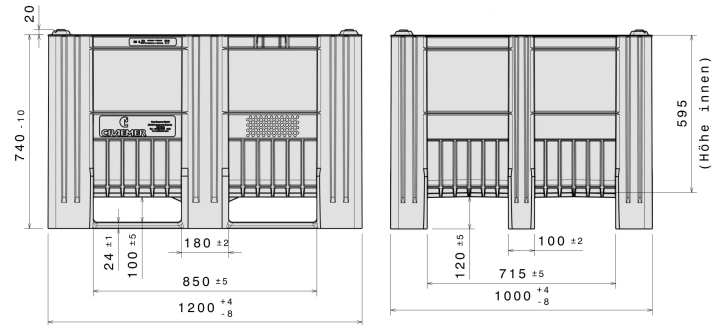

Art.-Nr.: 83281808

Technical data

Dimensions L x W x H (mm) 1200 x 1000 x 740

Weight (kg) 36.5 kg

Volume (l) 610 l

Material PE

Load capacity (kg)



Stacking Load
5000 kg



Holding Capacity
700 kg



Dynamic Load
1200

Characteristics

Colour: basalt grey

Manufactured in one piece

Runners: 3, unwelded

Stackable

Temperature stability: -30 °C to +40 °C, briefly up to +90 °C

Resistant to most chemicals and cleaning agents

Food-safe. HACCP compliant

Container is based on DIN EN 13626 and DIN EN ISO 12048

8

Options

Transponder (RFID)

Lid

Loading quantities (Pcs / Approximate amount)



Container

Container 20': **40**

Container 40': -

Container 40' High Cube: **106**

Conventional trailer 45' high cube container: **104**



Truck

MEGA-Trailer: **130**

Jumbo: **140-150**

Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.



*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

*3 **Stacking Load:** With a maximum stacking height of 6 boxes (5 on 1 stacking) and evenly distributed load at approx. 20 °C.
Dynamic Load: On a forklift with an evenly distributed load at a room temperature of approx. 20 °C.