




Euro Pallet Collar CC1 Easy, foldable handling for modern logistics



Euro-Pallet-Collar CC1

All advantages at a glance:


- 100% HDPE, no other materials (e.g. metal)
- Volume flexibility as use is adjustable to transport volume
- Increased vehicle fill (double or triple stacking)

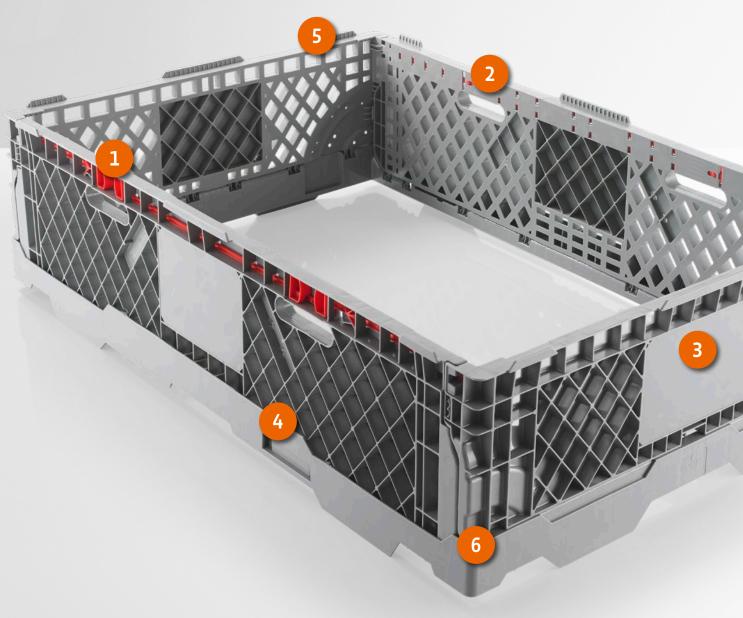



Locking

Movable locking elements release the locking mechanism safely and easily.



Labelling field Labelling field for application and removal of labels.




Handles

Integrated handles facilitate handling of the collars.



Transponder bracket Integrated transponder bracket for RFID transponder.



Interlocking

Collar interlocks with pallet lid or directly with pallet in place thanks to 10 mm outside rim.



Loading unit Ideal height for loading when using 6 collars and 2 pallets.



75% volume reduction

When folded, the collar can be transported in a non-slip and space-saving manner.



Empty transport


Safe empty transport due to optimal locking. Delivery unit 30-fold stacking on euro pallet.



Added value for your logistics.

Technical Data *1	Pallet Collar CC1
Exterior dimensions L x W x H (mm)	1220 × 815 × 300
Internal dimensions L x W x H (mm)	1160 × 750 × 300
Weight (kg)	7.8
Volume (I)	260
Material *2	HDPE
Stacking load in kg static (stack of 3 collars)	500

Sophisticated folding mechanism for easy handling:

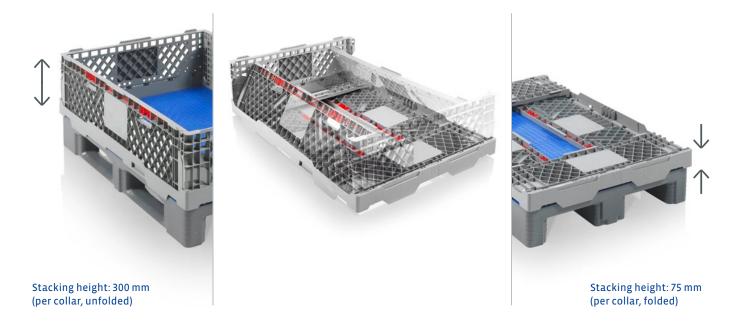

Do you have questions or require more detailed information?

We are happy to advise you.

www.craemer.com

Contact

Germany (headquarters) Craemer GmbH Brocker Straße 1 33442 Herzebrock-Clarholz Germany Tel.: +49 5245 43-0 Fax: +49 5245 43-201 E-mail: info@craemer.com

United Kingdom

Craemer UK Ltd Craemer House Hortonwood 1 Telford, Shropshire TF1 7GN United Kingdom Freephone: 0800 032 4291 Tel.: +44 1952 6078-00 Fax: +44 1952 6078-01 E-mail: enquiries.uk@craemer.com

*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without prior notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application. All dimensions given in the detailed images result from the height of the collar including rims as well as a base pallet with 150 mm building height. When used with other pallets, the overall

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

All dimensions given in the detailed images result from the height of the collar including rims as well as a base pallet with 150 mm building height. When used with other pallets, the overall values may vary.