



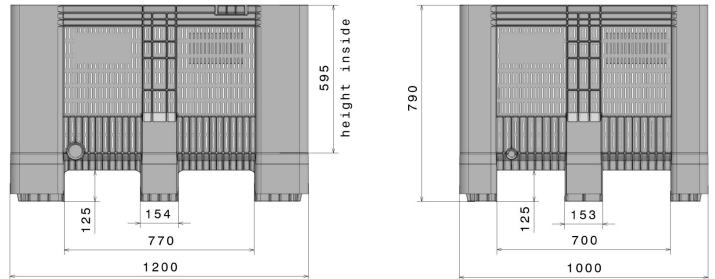


SB3 perforated

1200 x 1000 x 790 mm / 610 l

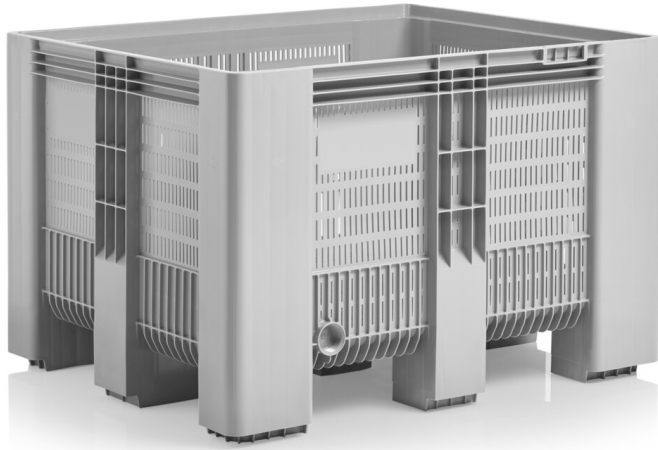

Art.-Nr.: 81940891

Technical Data*1			
External Dimensions L x W x H (mm)	1200 x 1000 x 790	Internal Dimensions L x W x H (mm)	1122 x 912 x 620
Weight (kg)	38.5 kg	Volume (l)	610 l
Material*2	PE		
Load capacity (kg)*3	 Extra Load 5000kg	 Holding Capacity 700kg	 Dynamic Load 1200kg

Characteristics	Options
Colour: light grey Manufactured in one piece Runners: 9 feet Stackable Temperature stability: -30°C to +40°C, briefly up to +90°C Resistant to most chemicals and cleaning agents Food-safe. HACCP compliant El contenedor se corresponde con los estándares DIN EN 13626 y DIN EN ISO 12048	Drain port Solid walls / base 3 Runners Lid

Loading quantities (Pcs / Approximate amount)		
 Container	Container 20': 30 Container 40': -	Container 40' High Cube: 84 Conventional trailer 45' high cube container: -
 Truck	MEGA-Trailer: 130	Jumbo: 140-150

Labelling
 Customised printing and numbering available on request depending on quantity. Position upon consultation.



*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

*3 Extra Load: at a room temperature of approx. 20°C.
 Dynamic Load: on a forklift with an evenly distributed load at a room temperature of approx. 20°C.