



CR4-5

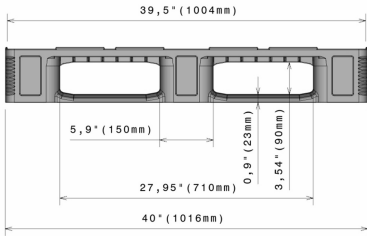


48" x 40"

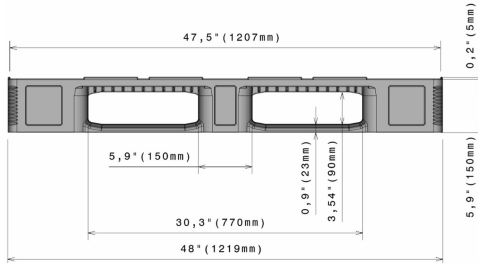

Art.-Nr.: 83352201



Technical Data^{*1}

Dimensions L x W x H (mm)	48 x 40 x 5.9" (1219 x 1016 x 150 mm)		
Weight (kg)	23.5 kg		
Material ^{*2}	PE		
Load capacity (kg) ^{*3}	 Static 7500 kg	 Dynamic 1250 kg	 In Racking System 1000 kg



Characteristics

Colour: black/blue
 Runners: 5, unwelded
 Rims: 5 mm
 Antislip: Palgrip[®] anti-slip strips on the top deck
 Temperature stability: -30 °C to +40 °C, briefly up to +90 °C

Options


Rimoptions
 Reinforcement profiles
 Transponder (RFID)

Loading quantities (Pcs / Approximate amount)

 Container	Container 20': 154	Container 40' High Cube: 358
	Container 40': -	Conventional trailer 45' high cube container: -
 Truck	MEGA-Trailer: 494	Jumbo: 532-570

Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.



^{*1} All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

^{*2} Our service team is pleased to be at your disposal if you require exact information about material compositions.

^{*3} **Static load:** resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C.
Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.
In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20 °C.