





CB3 UN 4H2



4H2/Y439/S/./D/BAM 15393-CR

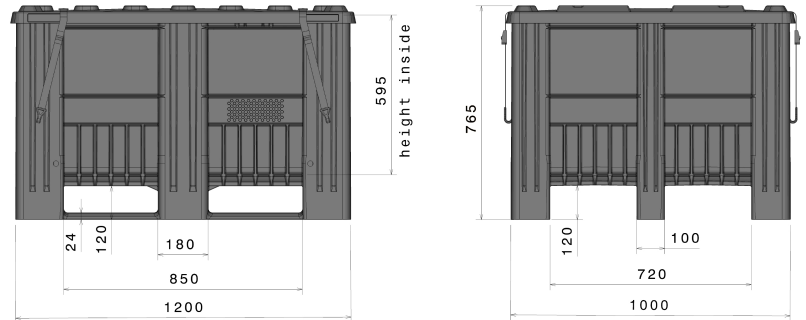

Art.-Nr.: 83281819


Technical Data*1			
External Dimensions L x W x H (mm)	1200 x 1000 x 740 mm (with lid: 1237 x 1036 x 765 mm)	Internal Dimensions L x W x H (mm)	1130 x 925 x 595 mm
Weight (kg)	43.8 kg	Volume (l)	610 l
Material*2	PE		
Load capacity (kg)	 Extra Load 1340kg	 Holding Capacity 438,8kg	 Dynamic Load

Characteristics	Options
<p>Colour: light grey</p> <p>Manufactured in one piece</p> <p>Runners: 3, unwelded</p> <p>With lid and 2 tensioning straps</p> <p>Stackable</p> <p>Temperature stability: -30°C to +40 °C, briefly up to +90 °C</p> <p>Resistant to most chemicals and cleaning agents</p> <p>Food-safe. HACCP compliant</p> <p>Container is based on DIN EN 13626 and DIN EN ISO 12048</p> <p>The design type complies with the test provisions of the international regulations for packagings for the transport of dangerous goods (packaging groups II and III)</p>	<p>Transponder (RFID)</p>

Loading quantities (Pcs / Approximate amount)		
 Container	Container 20': 37 Container 40': -	Container 40' High Cube: 100 Conventional trailer 45' high cube container: -
 Truck	MEGA-Trailer: 122	Jumbo: 132-142

Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.

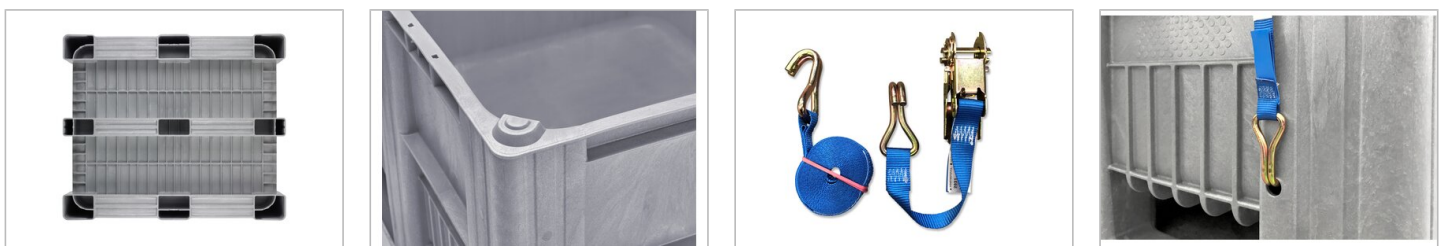

*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.