


# CR1

1200 x 800 mm

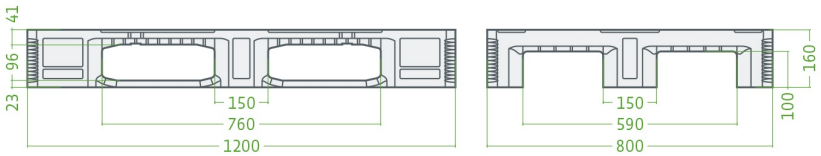


Art.-Nr.: 83232230

Palgrip


| Technical Data*[1] | | | |
|---|---|---|---|
| Dimensions L x W x H (mm) | 1200 x 800 x 160 mm | | |
| Weight (kg) | 19.0 kg | | |
| Material*[2] | PE | | |
| Load capacity (kg)*[3] | **Static**<br>7500 kg | **Dynamic**<br>1750 kg | **In Racking System**<br>1750 kg |


| Characteristics | Options |
|---|---|
| Colour: black / light blue<br>Runners: 3, unwelded<br>Reinforcement profiles: 3<br>Antislip: Palgrip® anti-slip strips on the top deck<br>Temperature stability: -30 °C to +40 °C, briefly up to +90 °C | Transponder (RFID)<br>Rimoptions<br>Lid |

| Loading quantities (Pcs / Approximate amount) | | |
|---|---|---|
| **Container** | Container 20': **192**<br>Container 40': **390** | Container 40' High Cube: **440**<br>Conventional trailer 45' high cube container: **510** |
| **Truck** | Standard semi-trailer: **495**<br>MEGA-Trailer: **612** | Jumbo: **684** |

**Labelling**

Customised printing and numbering available on request depending on quantity. Position upon consultation.






*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

*3 **Static load:** resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C.
**Dynamic load:** on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.
**In racking system:** evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20° C.

CR1, 83232230, 02/2021, Nr.3

Craemer GmbH | Brocker Strasse 1 | 33442 Herzebrock-Clarholz | Germany
Fon: +49 5245 43-0 | info@craemer.com | www.craemer.com

Craemer UK Ltd | Craemer House | Hortonwood 1 | Telford | Shropshire TF1 7GN | Great Britain
Fon: +44 1952 6078-00 | Fax: +44 1952 6078-01 | sales.uk@craemer.com | www.craemer.co.uk