



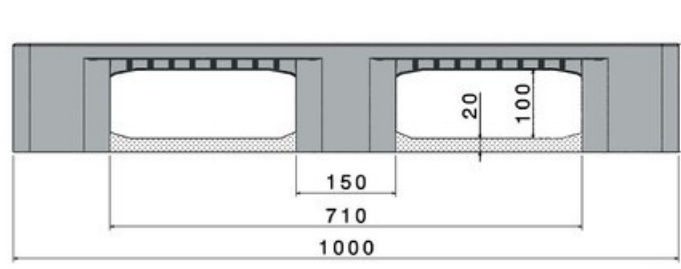

Art.-Nr.: 83332201 **Palgrip**

CR3-5

1200 x 1000 mm

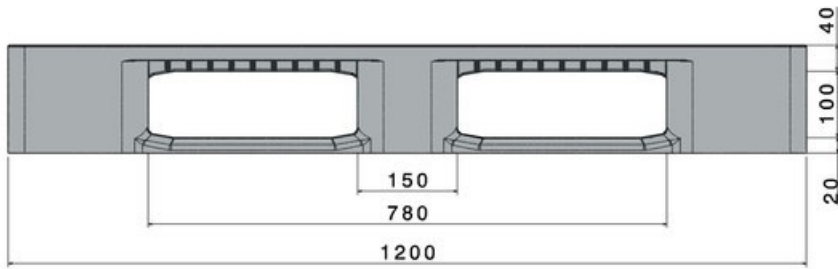

Technical Data*¹

Dimensions L x W x H (mm) 1200 x 1000 x 160 mm

Weight (kg) 25.0 kg

Material*² PE

Load capacity (kg)*³



Static

7500 kg



Dynamic

1500 kg



In Racking System

1400 kg

Characteristics

Options

Colour: black / light blue

Runners: 5, unwelded

Reinforcement profiles: 5 Transponder (RFID)
Reinforcement profiles

Rims: 5 mm Rim options
Lid

Antislip: Palgrip® anti-slip strips on the top deck

Temperature stability: -30 °C to +40 °C, briefly up to +90 °C

Loading quantities (Pcs / Approximate amount)



Container 20': **141** Container 40' High Cube: **340**
Container 40': **300** Conventional trailer 45' high cube container: -

Container




MEGA-Trailer: **468** Jumbo: **504-540**

Truck

Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.

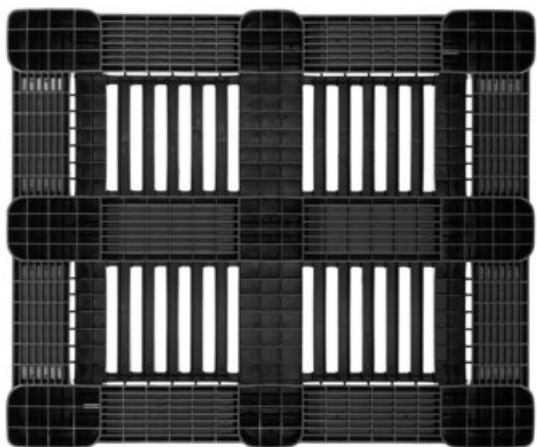

All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*² Our service team is pleased to be at your disposal if you require exact information about material compositions.

Static load: resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C.

*³ **Dynamic load:** on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.

In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20°C.

CR3 / CR3-5, 83332201, 02/2021, Nr.6