

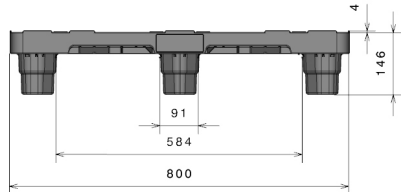


NP1

1200 x 800 mm

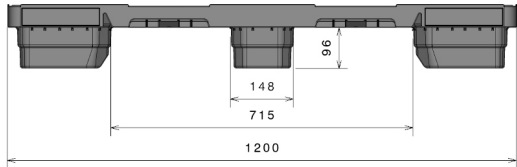

Art.-Nr.: 83551201

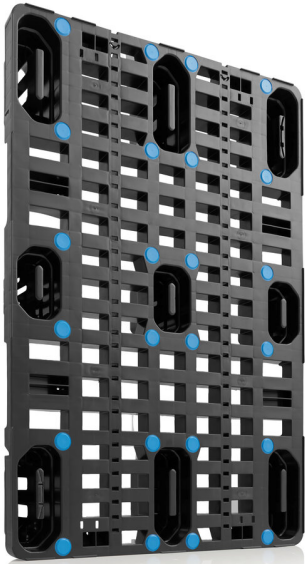

Technical Data*1

Dimensions L x W x H (mm)	1200 x 800 x 146 mm		
Weight (kg)	8.5 kg		
Material*2	PE		
Load capacity (kg)*3	 Static 2500 kg	 Dynamic 1000 kg	 In Racking System

Characteristics

Colour: black
 Runners: 9 feet
 Rims: 4 mm
 Antislip: Palgrip® anti-slip pads on the top deck
 Temperature stability: -30 °C to +40 °C, briefly up to +90 °C
 Nesting Height: 54 mm

Options


Rimoptions
 Transponder (RFID)
 Reinforcement profiles
 Lid
 Palgrip® anti-slip clips on the underside of the deck

Loading quantities (Pcs / Approximate amount)

 Container	Container 20': 440 Container 40': 920	Container 40' High Cube: 989 Conventional trailer 45' high cube container: -
 Truck	MEGA-Trailer: 1419	Jumbo: 1634

Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.

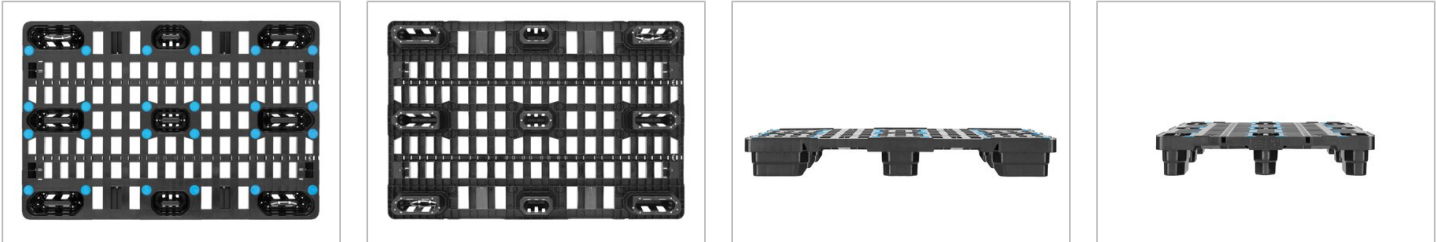

*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.
 *2 Our service team is pleased to be at your disposal if you require exact information about material compositions.
 *3 **Static load:** resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C.
Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.
In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20 °C.