





Art.-Nr.: 83271999

CB3 High UN 11H2

11H2/X/..../F/CRAEMER BVT 40514/2880/800

1 2 3 6



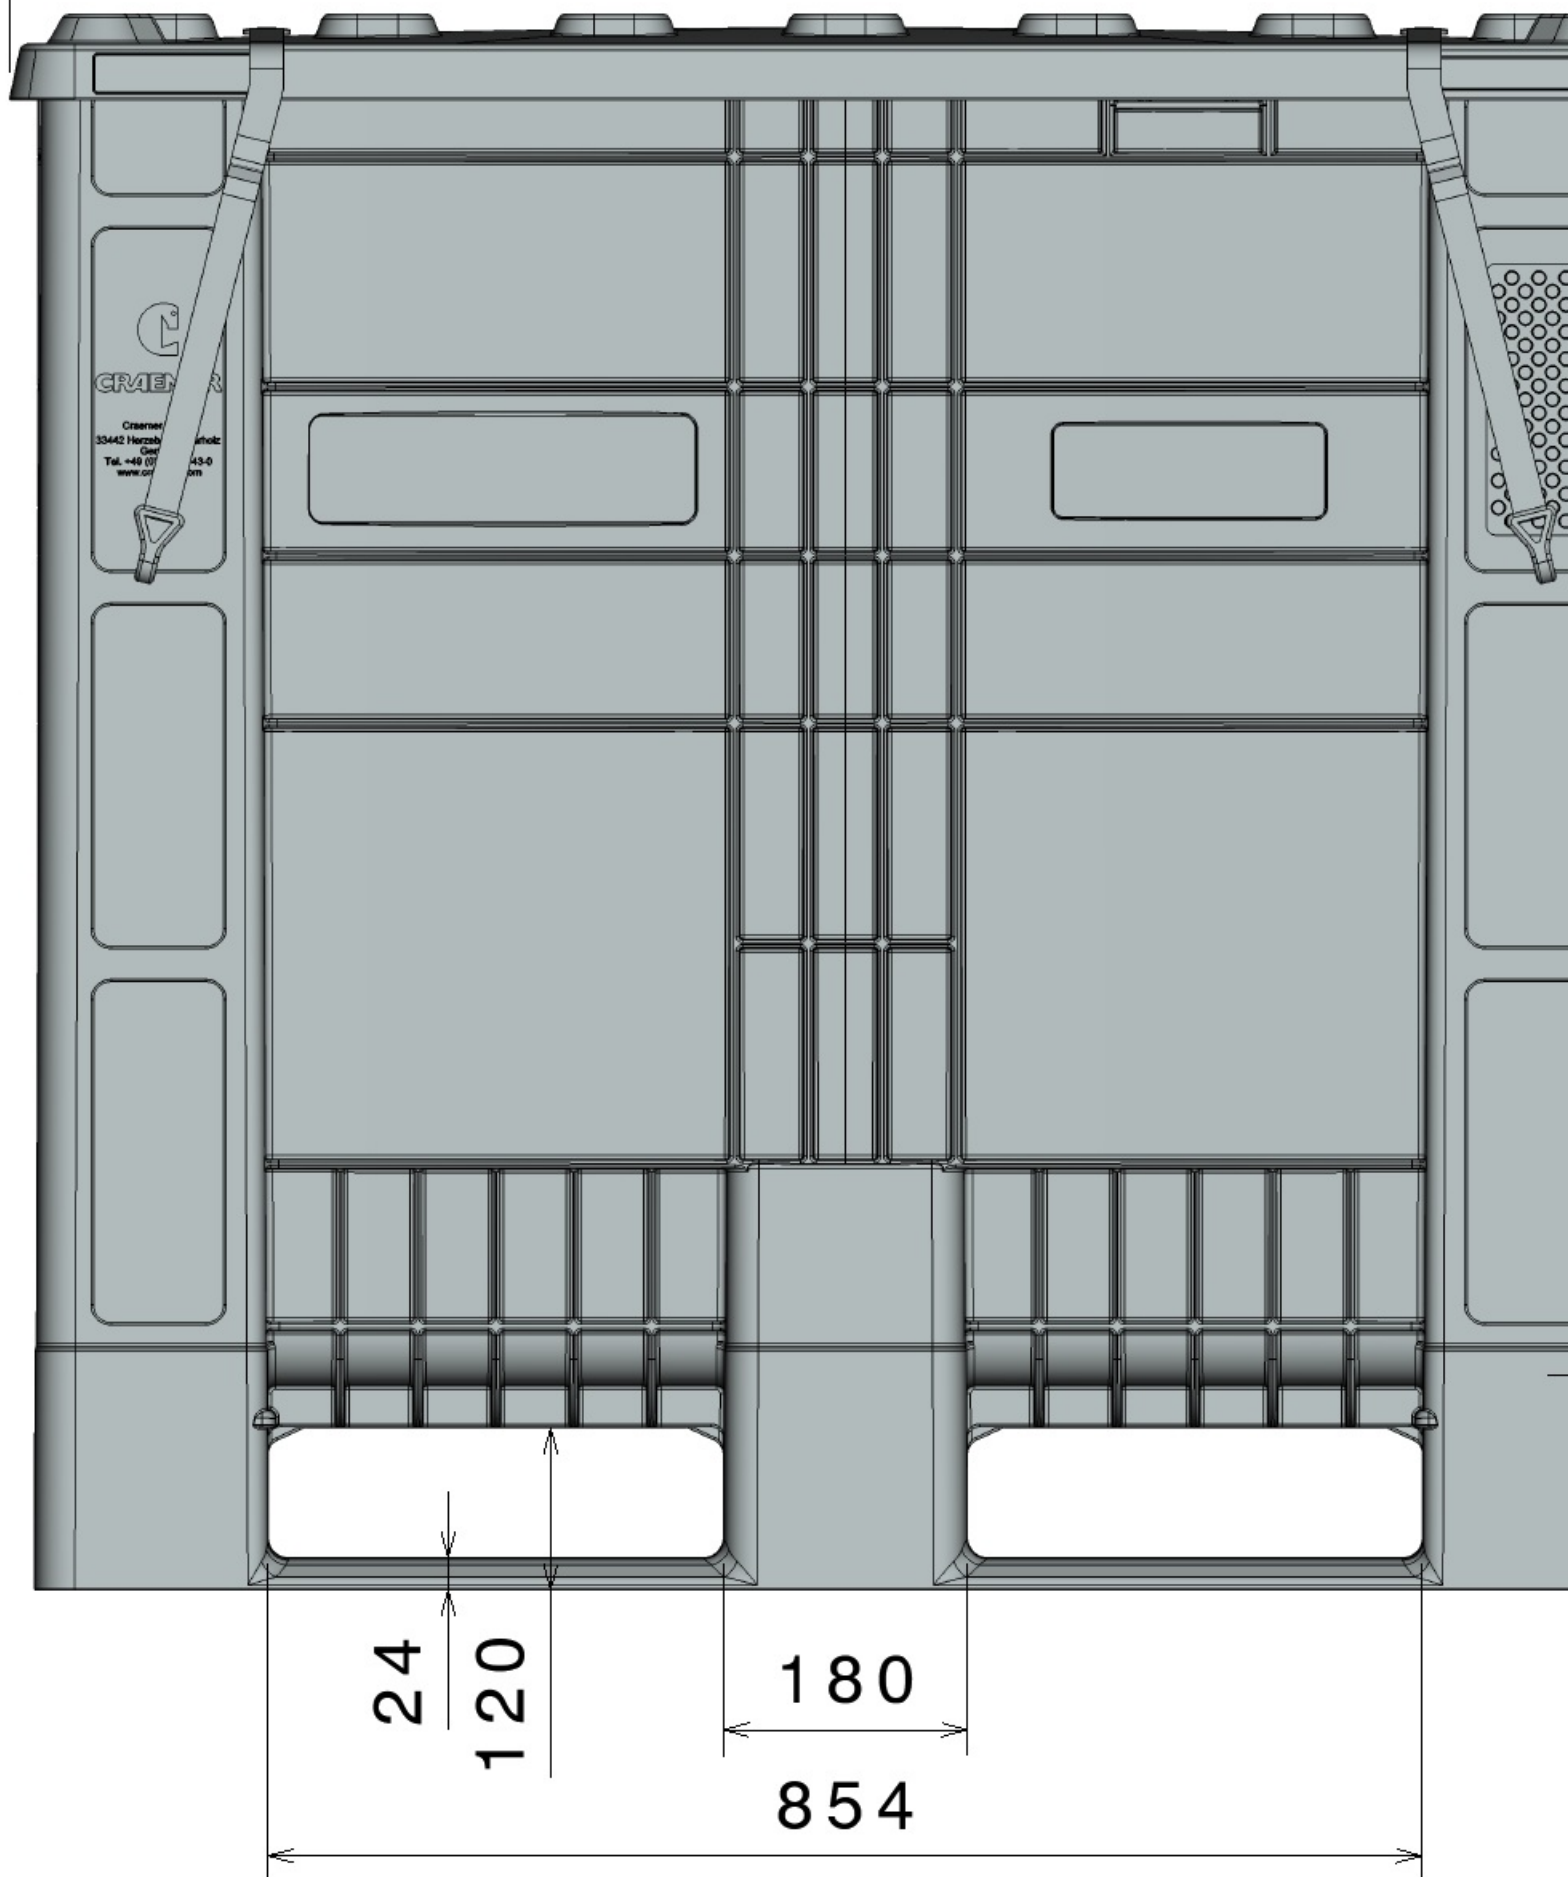

External Dimensions (mm)1200 x 1000 x 1140 mm
(with lid: 1237 x 1036 x 1166 mm)

Internal Dimensions (mm)1108 x 897 x 983 mm

Weight (kg)56.5 kg

Volume (l)1000 l

Material*2PE

Load capacity (kg)



Extra Load
1600kg

Characteristics



Holding Capacity
800kg



Dynamic Load

Options

Colour:

light grey

Manufactured in one piece

Runners:

3, unwelded

With lid and 2 tensioning straps

Stackable

Temperature stability:

-30 °C to +40 °C, briefly up to +90 °C

Transponder (RFID)

Resistant to most chemicals and cleaning agents

Food-safe. HACCP compliant

Container is based on DIN EN 13626 and DIN EN ISO 12048



The design type complies with the test provisions of the international regulations for packagings for the transport of dangerous goods (packaging groups II and III)

Loading quantities (Pcs / Approximate amount)

On request

Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.

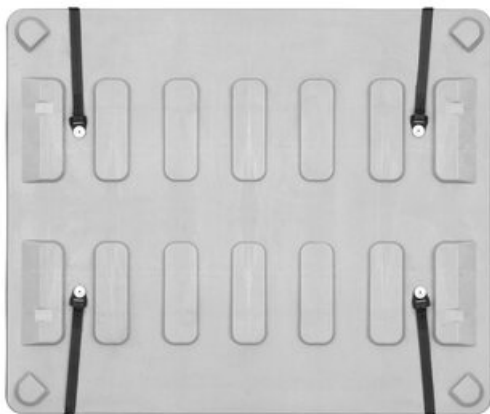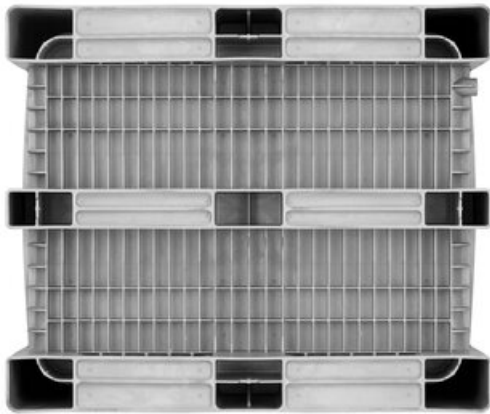

All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application. Periodic Inspection (Operator Responsibility): In accordance with ADR 6.5.4.4.1 (b), this type (11H2) must undergo a mandatory inspection at intervals not exceeding 30 months. This includes an assessment of the external condition and the proper functioning of service equipment.

*² Our service team is pleased to be at your disposal if you require exact information about material compositions.

CB3 High UN 11H2, 83271999, 02/2025, Nr.1