

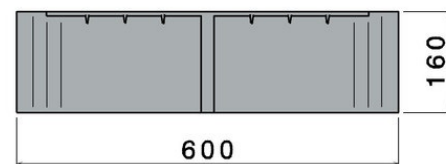
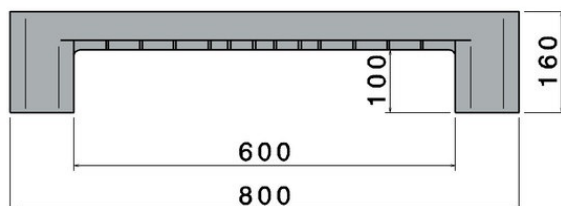


**H2**  
31.5" x 23.6"

Art.-Nr.: 83170811



| Technical Data*1                                                                                                         |                                                        |                                                                                                              |                                                                                                               |
|--------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Dimensions L x W x H                                                                                                     |                                                        | 31.5 x 23.6 x 6.3 " (800 x 600 x 160 mm)                                                                     |                                                                                                               |
| Weight(lbs)                                                                                                              |                                                        | 19.8 lbs                                                                                                     |                                                                                                               |
| Material*2                                                                                                               |                                                        | PE                                                                                                           |                                                                                                               |
| Load capacity (lbs)                                                                                                      |                                                        |  <b>Static</b><br>4450 lbs  |  <b>Dynamic</b><br>1100 lbs |
|                                                                                                                          |                                                        |  <b>In Racking System</b> |                                                                                                               |
| Characteristics                                                                                                          |                                                        | Options                                                                                                      |                                                                                                               |
| Color: light gray<br>Runners: 2, unwelded<br>Lips: 0.3 "<br>Temperature stability: -22°F to +104°F, briefly up to +194°F |                                                        | Central box retainers<br>Lip options<br>Lid                                                                  |                                                                                                               |
| Loading quantities (Pcs / Approximate amount)                                                                            |                                                        |                                                                                                              |                                                                                                               |
|  <b>Container</b>                      | Container 20': <b>384</b><br>Container 40': <b>780</b> | Container 40' High Cube: <b>880</b><br>Conventional trailer 45' high cube container: -                       |                                                                                                               |
|  <b>Truck</b>                          | MEGA-Trailer: <b>1224</b>                              | Jumbo: <b>1368</b>                                                                                           |                                                                                                               |
| Labelling                                                                                                                |                                                        |                                                                                                              |                                                                                                               |
| Customized printing and numbering available on request depending on quantity. Position upon consultation.                |                                                        |                                                                                                              |                                                                                                               |

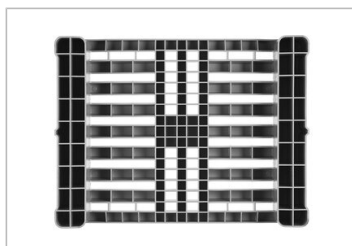

\*1 All technical data reflect characteristic features tested under specially defined conditions. Variations may occur due to different usage conditions, such as loading method, ambient temperature, and storage duration. All data and specifications are subject to change without notice. Our service team is happy to assist in reviewing the specific requirements of your individual application.

\*2 Our service team is available to provide precise information about material compositions.

\*3 **Static load:** Resistance to pressure on a flat surface with an evenly distributed load at a room temperature of approx. 68°F.

**Dynamic load:** On a forklift with an evenly distributed load at a room temperature of approx. 68°F.

**In racking system:** Evenly distributed load (sacks) along the longitudinal sides, resting on two supports for over 100 h at a room temperature of approx. 68°F.