








H1
47.2" x 31.5"

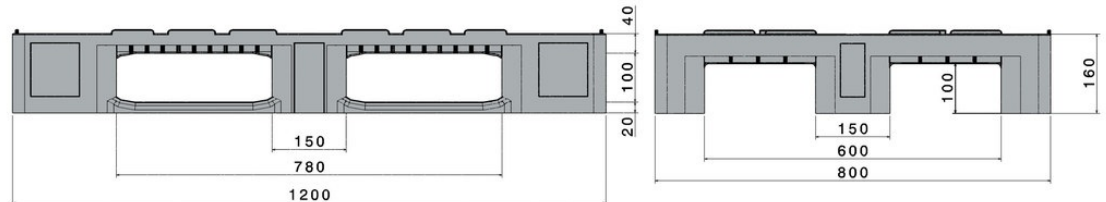

Art.-Nr.: 83100801

| Technical Data*1 | | | | |
|--|--|--|---|--|
| Dimensions L x W x H | | 47.2 x 31.5 x 6.3 " (1200 x 800 x 160 mm) | | |
| Weight (lbs) | | 39.7 lbs | | |
| Material*2 | | PE | | |
| Load capacity (lbs) | | <div> Static 11000 lbs</div> | <div> Dynamic 2800 lbs</div> | <div> In Racking System 2200 lbs</div> |
| Characteristics | | Options | | |
| Color: light gray Runners: 3, welded Lips: 0.3 " Temperature stability: -22°F to +104°F, briefly up to +194°F | | Lid Transponder (RFID) Palgrip® anti-slip runners | | |
| Loading quantities (Pcs / Approximate amount) | | | | |
|  Container | Container 20': 192 Container 40': 390 | Container 40' High Cube: 440 Conventional trailer 45' high cube container: - | | |
|  Truck | MEGA-Trailer: 594 | | Jumbo: 684 | |
| Labelling | | | | |
| Customized printing and numbering available on request depending on quantity. Position upon consultation. | | | | |



- *1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.
- *2 Our service team is pleased to be at your disposal if you require exact information about material compositions.
- *3 Static load: resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C.
 Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.
 In racking system: evenly distributed load (E2 boxes or euro fish boxes) along the longitudinal sides. Resting on two supports for over 100h at a room temperature of approx. 20 °C.