


H1

47.2" x 31.5"

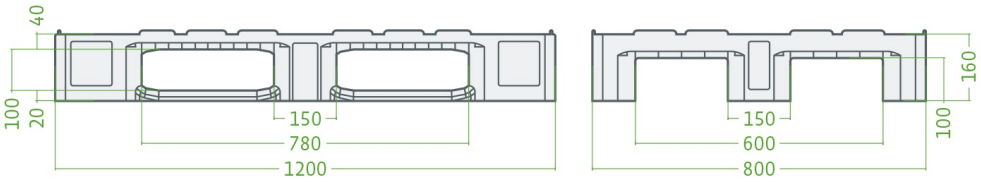

Art.-Nr.: 83100801

Technical Data*1

Dimensions L x W x H	47.2 x 31.5 x 6.3 " (1200 x 800 x 160 mm)
Weight (lbs)	39.7 lbs
Material*2	PE
Load capacity (lbs)	**Static** 11000 lbs; **Dynamic** 2800 lbs; **In Racking System** 2200 lbs

Characteristics

Color: light gray
Runners: 3, welded
Lips: 0.3 "
Temperature stability: -22°F to +104°F, briefly up to +194°F

Options


Lid
Transponder (RFID)
Palgrip® anti-slip runners


Loading quantities (Pcs / Approximate amount)

Container	Container 20': **192** Container 40': **390**	Container 40' High Cube: **440** Conventional trailer 45' high cube container: **510**
Truck	Standard semi-trailer: **495** MEGA-Trailer: **594**	Jumbo: **684**

Labelling

Customized printing and numbering available on request depending on quantity. Position upon consultation.

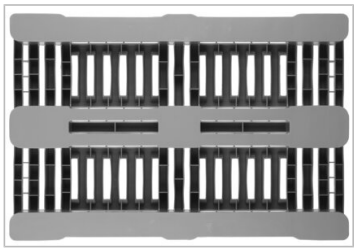

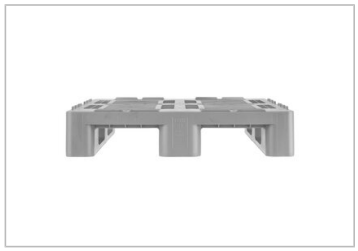*1 All technical data reflect characteristic features tested under specially defined conditions. Variations may occur due to different usage conditions, such as loading method, ambient temperature, and storage duration. All data and specifications are subject to change without notice. Our service team is happy to assist in reviewing the specific requirements of your individual application.

*2 Our service team is available to provide precise information about material compositions.

*3 **Static load:** Resistance to pressure on a flat surface with an evenly distributed load at a room temperature of approx. 68 °F.
Dynamic load: On a forklift with an evenly distributed load at a room temperature of approx. 68 °F.
In racking system: Evenly distributed load (E2 boxes or Euro fish boxes) along the longitudinal sides, resting on two supports for over 100 h at a room temperature of approx. 68 °F.

H1, 83100801, 02/2021, Nr.4

Craemer GmbH | Brocker Strasse 1 | 33442 Herzebrock-Clarholz | Germany
Phone: +49 5245 43-0 | info@craemer.com | www.craemer.com

Craemer US Corporation | 30725 US HWY 19 N #304 | Palm Harbor | FL 34684 | USA
Phone: +1 413 725-5387 | info@craemer.com | www.craemer.com/us