









H1
47.2" x 31.5"

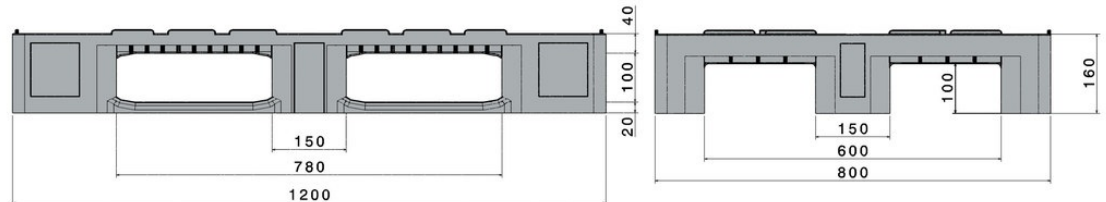

Art.-Nr.: 83102216

Technical Data*1			
Dimensions L x W x H	47.2 X 31.5 X 6.3 " (1200 X 800 X 160 mm)		
Weight(lbs)	36.4 lbs		
Material*2	PE		
Load capacity (lbs)	 Static 11000 lbs	 Dynamic 2200 lbs	 In Racking System 1322.8 lbs
Characteristics		Options	
Color: black		Lip options	
Runners: 3, unwelded		Palgrip® anti-slip runners	
Lips: 0.3 "		Lid	
Temperature stability: -22°F to +104°F, briefly up to +194°F		Transponder (RFID)	
Loading quantities (Pcs / Approximate amount)			
 Container	Container 20': 192 Container 40': 390	Container 40' High Cube: 440 Conventional trailer 45' high cube container: -	
 Truck	MEGA-Trailer: 594	Jumbo: 684	
Labelling			
Customized printing and numbering available on request depending on quantity. Position upon consultation.			



- *1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.
- *2 Our service team is pleased to be at your disposal if you require exact information about material compositions.
- *3 Static load: resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C.
Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.
In racking system: evenly distributed load (E2 boxes or euro fish boxes) along the longitudinal sides. Resting on two supports for over 100h at a room temperature of approx. 20 °C.