




CR3-5
47.2" x 39.4"



Art.-Nr.: 83330701

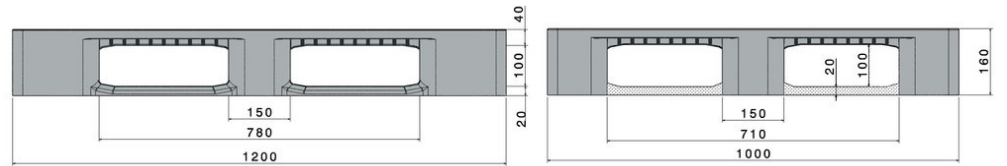

Technical Data^{*1}

Dimensions L x W x H	47.2 x 39.4 x 6.3 (1200 x 1000 x 160 mm)
Weight (lbs)	47.4 lbs
Material ^{*2}	PE

Load capacity (lbs)	 Static 11000 lbs	 Dynamic 2800 lbs	 In Racking System 2200 lbs
---------------------	--	---	--

Characteristics

Color: red brown / light blue
Runners: 5, unwelded
Lips: 0.2"
Antislip: Palgrip® anti-slip strips on the top deck
Temperature stability: -22°F to +104°F, briefly up to +194°F

Options




Transponder (RFID)
Reinforcement profiles
Lip options
Lid

Loading quantities (Pcs / Approximate amount)

 Container	Container 20': 141	Container 40' High Cube: 340
	Container 40': 300	Conventional trailer 45' high cube container: -
 Truck	MEGA-Trailer: 468	Jumbo: 504-540

Labelling

Customized printing and numbering available on request depending on quantity. Position upon consultation.

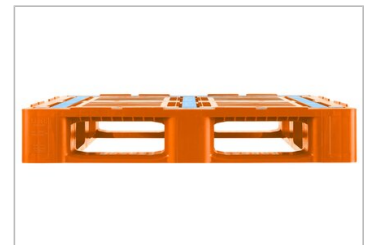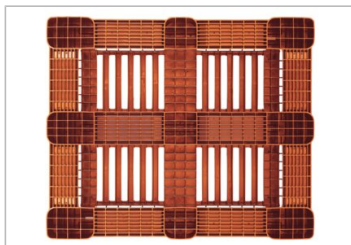

^{*1} All technical data reflect characteristic features tested under specially defined conditions. Variations may occur due to different usage conditions, such as loading method, ambient temperature, and storage duration. All data and specifications are subject to change without notice. Our service team is happy to assist in reviewing the specific requirements of your individual application.

^{*2} Our service team is available to provide precise information about material compositions.

^{*3} **Static load:** Resistance to pressure on a flat surface with an evenly distributed load at a room temperature of approx. 68°F.

Dynamic load: On a forklift with an evenly distributed load at a room temperature of approx. 68°F.

In racking system: Evenly distributed load (sacks) along the longitudinal sides, resting on two supports for over 100 h at a room temperature of approx. 68°F.