







D3
47.2" x 39.4"

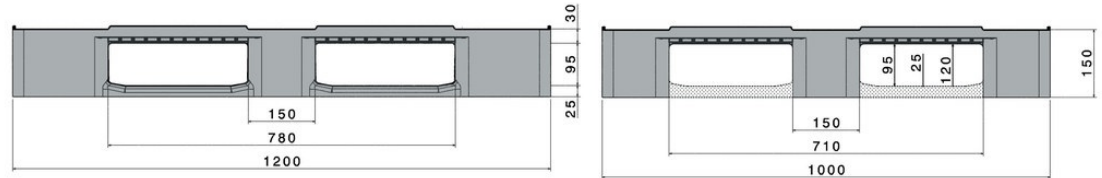

Art.-Nr.: 83325231

Technical Data*1			
Dimensions L x W x H	47.2 X 39.4 X 5.9 " (1200 X 1000 X 150 mm)		
Weight (lbs)	37.5 lbs		
Material*2	PE		
Load capacity (lbs)	 Static 11000 lbs	 Dynamic 2800 lbs	 In Racking System 2200 lbs
Characteristics		Options	
Color: black		Transponder (RFID)	
Runners: 3, unwelded		Reinforcement profiles	
Reinforcement profiles: 3		Lip options	
Lips: 0.3 "		Antislip	
Temperature stability: -22°F to +104°F, briefly up to +194°F		Lid	
Loading quantities (Pcs / Approximate amount)			
 Container	Container 20': 140 Container 40': 330	Container 40' High Cube: 365 Conventional trailer 45' high cube container: -	
 Truck	MEGA-Trailer: 494	Jumbo: 532-570	
Labelling			
Customized printing and numbering available on request depending on quantity. Position upon consultation.			

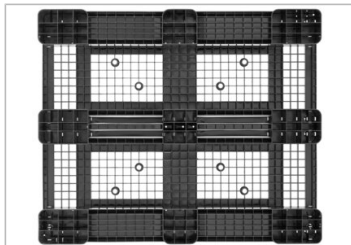

- *1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.
- *2 Our service team is pleased to be at your disposal if you require exact information about material compositions.
- *3 **Static load:** resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 68°F.
Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 68°F.
In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 68°F.