







# Universal container

55 gal

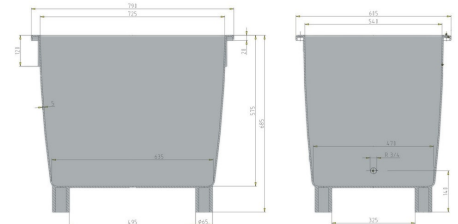

Art.-Nr.: 81021830

| Technical Data**  |   |                                    |   |                                |  |
|---|---|------------------------------------|---|--------------------------------|--|
| External Dimensions   | 31.1 x 23.8 x 27.0 "  |                                    | Internal Dimensions   | 28.5 x 21.3 x 22.6 "           |  |
| Weight (lbs)  | 19.6 lbs  |                                    |   |                                |  |
| Nennvolumen (l) test 1  | 55 gal  |                                    |   |                                |  |
| Material  | PE  |                                    |   |                                |  |
| Load capacity (lbs)   |    | <b>Holding Capacity</b><br>450 lbs |    | <b>Extra Load</b><br>600 lbs   |  |
| Stacking height   |  | <b>When nested</b><br>4.5 Inch     |  | <b>When stacked</b><br>26 Inch |  |
| Characteristics   |   |                                    | Options   |                                |  |
| Color: basalt gray<br>4 feet, galvanized bars<br>Nestable<br>For temperatures ranging from -22°F to +104°F, briefly up to +194°F<br>Accessible with forklift and lift truck |   |                                    | Lid   |                                |  |
| Loading quantities (Pcs / Approximate amount)   |   |                                    |   |                                |  |
| On request  |   |                                    |   |                                |  |
| Labelling   |   |                                    |   |                                |  |
| Customized printing and numbering available on request depending on quantity. Position upon consultation.   |   |                                    |   |                                |  |



\*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.