
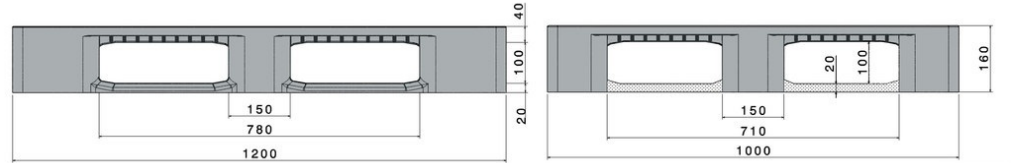


CR3

47.2" x 39.4"

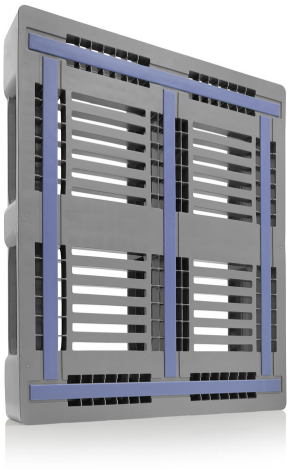

Art.-Nr.: 83335850

Palgrip

Technical Data^{*1}

Dimensions L x W x H	47.2 x 39.4 x 6.3 (1200 x 1000 x 160 mm)
Weight (lbs)	51.8 lbs
Material ^{*2}	PE

Load capacity (lbs)



Static
16550 lbs



Dynamic
3300 lbs



In Racking System
3100 lbs

Characteristics

Color: dark gray / blue
Runners: 3, unwelded
Reinforcement profiles: 5
Antislip: Palgrip® anti-slip strips on the top deck
Temperature stability: -22°F to +104°F, briefly up to +194°F

Options

Lip options
Transponder (RFID)
Reinforcement profiles
Lid

Loading quantities (Pcs / Approximate amount)



Container

Container 20': **141**
Container 40': **300**

Container 40' High Cube: **340**
Conventional trailer 45' high cube container: -




Truck

MEGA-Trailer: **468**

Jumbo: **504-540**

Labelling

Customized printing and numbering available on request depending on quantity. Position upon consultation.

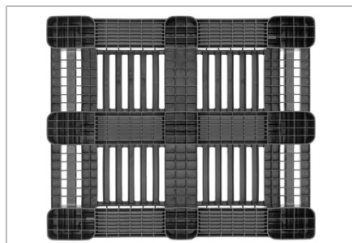

^{*1} All technical data reflect characteristic features tested under specially defined conditions. Variations may occur due to different usage conditions, such as loading method, ambient temperature, and storage duration. All data and specifications are subject to change without notice. Our service team is happy to assist in reviewing the specific requirements of your individual application.

^{*2} Our service team is available to provide precise information about material compositions.

^{*3} **Static load:** Resistance to pressure on a flat surface with an evenly distributed load at a room temperature of approx. 68°F.

Dynamic load: On a forklift with an evenly distributed load at a room temperature of approx. 68°F.

In racking system: Evenly distributed load (sacks) along the longitudinal sides, resting on two supports for over 100 h at a room temperature of approx. 68°F.