


# CR4-5

48" x 40"



Art.-Nr.: 83352201

Palgrip

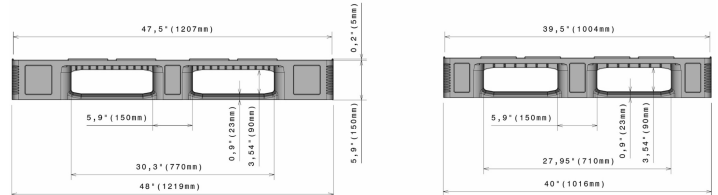

## Technical Data\*1

|                      |                                                                                                              |                                                                                                               |                                                                                                                          |
|----------------------|--------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Dimensions L x W x H | 48 x 40 x 5.9" (1219 x 1016 x 150 mm)                                                                        |                                                                                                               |                                                                                                                          |
| Weight (lbs)         | 51.8 lbs                                                                                                     |                                                                                                               |                                                                                                                          |
| Material*2           | PE                                                                                                           |                                                                                                               |                                                                                                                          |
| Load capacity (lbs)  |  <b>Static</b><br>16550 lbs |  <b>Dynamic</b><br>2800 lbs |  <b>In Racking System</b><br>2200 lbs |

## Characteristics

Color: black/blue  
 Runners: 5, unwelded  
 Lips: 0.2"  
 Antislip: Palgrip® anti-slip strips on the top deck  
 Temperature stability: -22°F to +104°F, briefly up to +194°F

## Options


Lip options  
 Reinforcement profiles  
 Transponder (RFID)

## Loading quantities (Pcs / Approximate amount)

|                                                                                                     |                                                                                                 |                                                                                        |
|-----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
|  <b>Container</b> | Container 20': <b>154</b><br>Container 40': -                                                   | Container 40' High Cube: <b>358</b><br>Conventional trailer 45' high cube container: - |
|                                                                                                     |  <b>Truck</b> | MEGA-Trailer: <b>494</b><br>Jumbo: <b>532-570</b>                                      |

## Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.



\*1 All technical data reflect characteristic features tested under specially defined conditions. Variations may occur due to different usage conditions, such as loading method, ambient temperature, and storage duration. All data and specifications are subject to change without notice. Our service team is happy to assist in reviewing the specific requirements of your individual application.

\*2 Our service team is available to provide precise information about material compositions.

\*3 **Static load:** Resistance to pressure on a flat surface with an evenly distributed load at a room temperature of approx. 68°F.  
**Dynamic load:** On a forklift with an evenly distributed load at a room temperature of approx. 68°F.

**In racking system:** Evenly distributed load (sacks) along the longitudinal sides, resting on two supports for over 100 h at a room temperature of approx. 68°F.