




CB3 High

47.2 x 39.4 x 44.9" / 264 gal

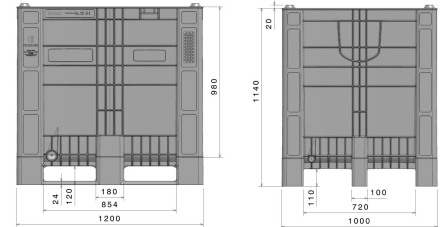

Art.-Nr.: 83271810

Technical Data*1

External Dimensions	47.2 x 39.4 x 44.9" (1200 x 1000 x 1140 mm)	Internal Dimensions	43.6 x 35.3 x 38.7" (1108 x 897 x 983 mm)
Weight (lbs)	109.1 lbs	Volume	265 gal
Material*2	PE		

Load capacity (lbs)	Extra Load 8850 lbs	Holding Capacity 2200 lbs	Dynamic Load 3350 lbs
---------------------	-------------------------------	-------------------------------------	---------------------------------

Characteristics Options

<p>Color: light gray</p> <p>Manufactured in one piece</p> <p>Runners: 3, unwelded</p> <p>Stackable</p> <p>Temperature stability: -22°F to +104°F, briefly up to +194°F</p> <p>Resistant to most chemicals and cleaning agents</p> <p>Food-safe. HACCP compliant</p> <p>Container is based on DIN EN 13626 and DIN EN ISO 12048</p>	<p>Trunnions</p> <p>9 feet</p> <p>Lid</p>
------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------

Loading quantities (Pcs / Approximate amount)

Container	Container 20': - Container 40': -	Container 40' High Cube: 44 Conventional trailer 45' high cube container: -
------------------	--------------------------------------	---------------------------------------------------------------------------------------

Truck	MEGA-Trailer: 52	Jumbo: 56-60
--------------	-------------------------	---------------------

Labelling

Customized printing and numbering available on request depending on quantity. Position upon consultation.



*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

*3 Extra Load: with a holding capacity of 1000 kg at approx. 68 °F.
Dynamic Load: on a forklift with an evenly distributed load at a room temperature of approx. 68 °F.