






D2 ESD

31.5" x 23.6"



Art.-Nr.: 83510221

Technical Data*1			
Dimensions L x W x H	31.5 x 23.6 x 6.3" (800 x 600 x 160 mm)		
Weight(lbs)	18.7 lbs		
Material*2	, PP , ESD		
Load capacity (lbs)	 Static 4450 lbs	 Dynamic 1100 lbs	 In Racking System
Characteristics		Options	
Color: black Runners: 3, unwelded Lips: 0.3 " Temperature stability: 0 °F to 105 °F, short-term up to 200 °F ESD pallet Surface resistance of ≥ 1 x 10 E4 Ohm to < 1 x 10 E11 Ohm		Antislip Lip options Lid	
Loading quantities (Pcs / Approximate amount)			
 Container	Container 20': 384 Container 40': 780	Container 40' High Cube: 880 Conventional trailer 45' high cube container: -	
 Truck	MEGA-Trailer: 1224	Jumbo: 1368	
Labelling			
Customized printing and numbering available on request depending on quantity. Position upon consultation.			

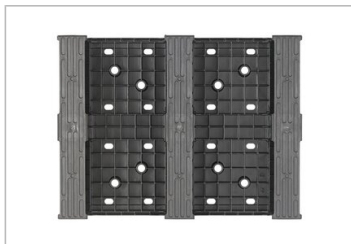

*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

*3 **Static load:** resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 68 °F.

Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 68 °F.

In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 68 °F.