



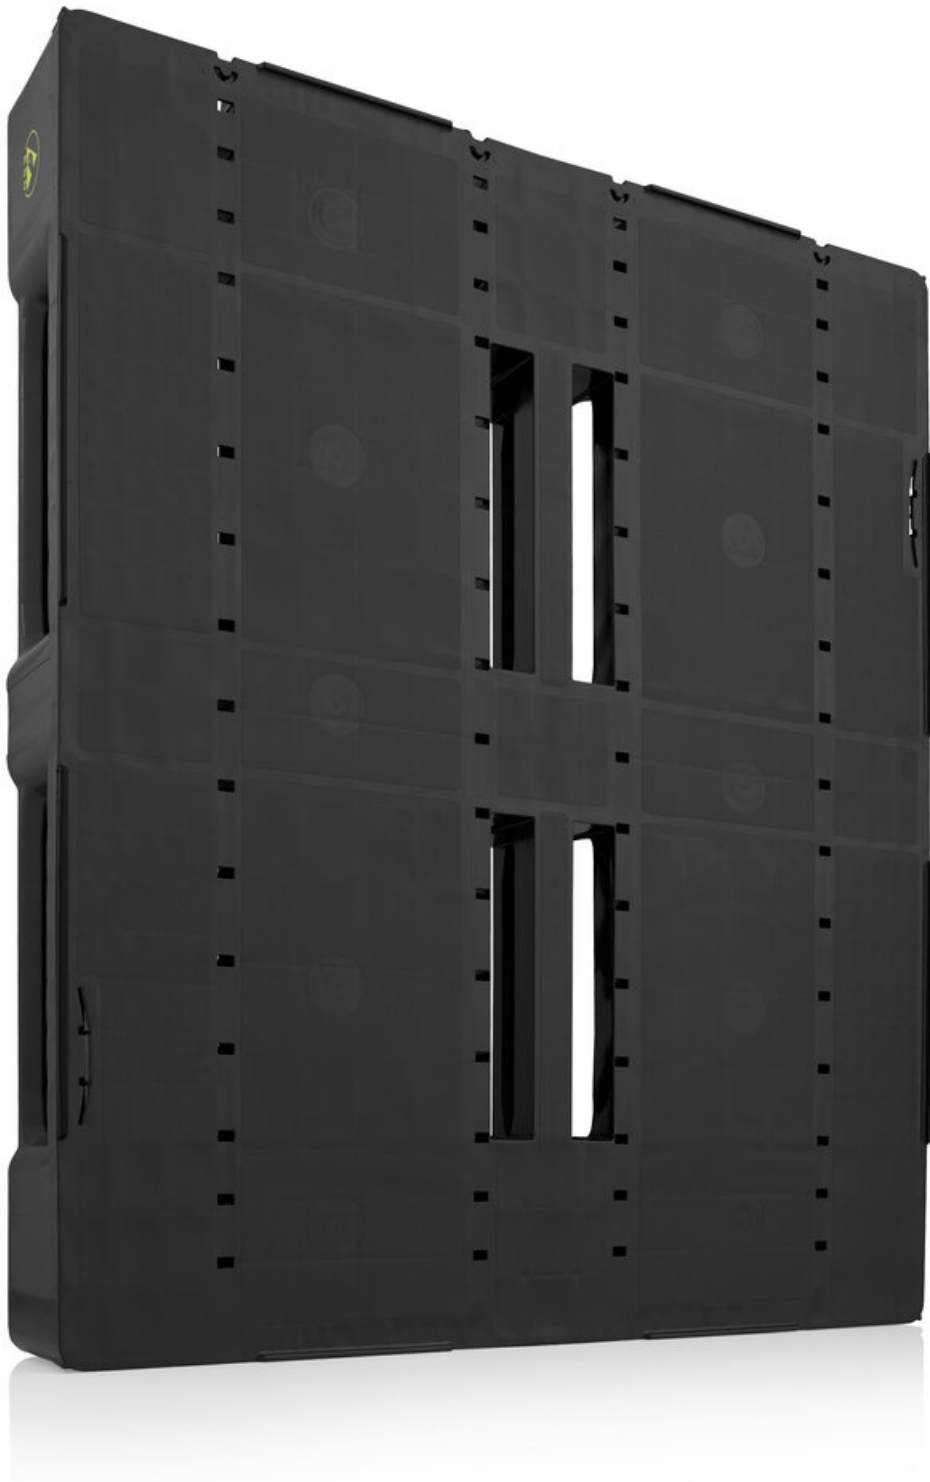

Art.-Nr.: 83222208

CS3 ESD

47.2" x 39.4"

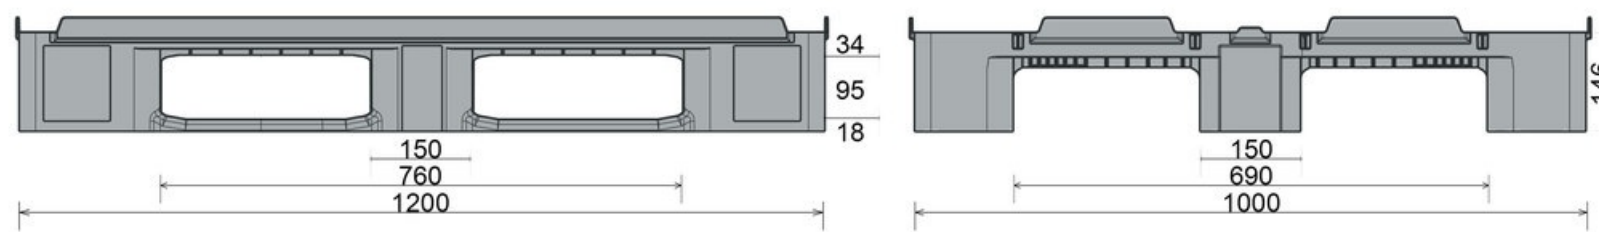

Technical Data\*1

Dimensions L x W x H 47.2 x 39.4 x 5.7 " (1200 x 1000 x 146 mm)

Weight (lbs) 35.3 lbs

Material\*2 PE , ESD

Load capacity (lbs)



Static  
11000 lbs



Dynamic  
2200 lbs



In Racking System  
900 lbs

Characteristics

Options

Color: black

Runners: 3, unwelded

Lips: 0.9 " outside

Transponder (RFID)  
Lid

Temperature stability: -22°F to +104°F, briefly up to +194°F

ESD pallet

Surface resistance of  $\geq 1 \times 10^4$  Ohm to  $< 1 \times 10^{11}$  Ohm

Loading quantities (Pcs / Approximate amount)



Container 20': **140** Container 40' High Cube: **365**  
Container 40': **330** Conventional trailer 45' high cube container: -

Container





MEGA-Trailer: **494** Jumbo: **532-570**

**Truck**

**Labelling**

Customized printing and numbering available on request depending on quantity. Position upon consultation.

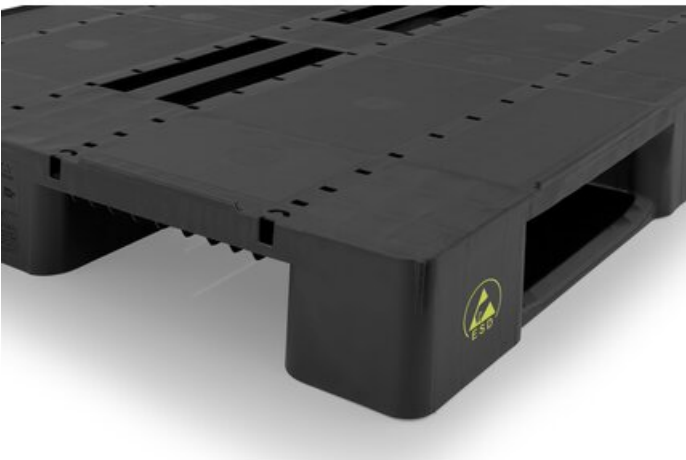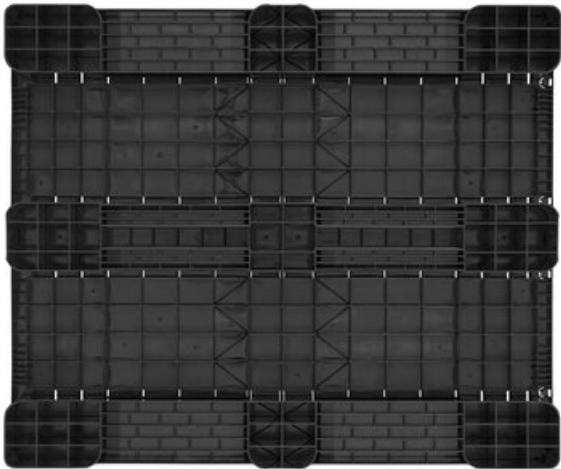



All technical data reflect characteristic features tested under specially defined conditions. Variations may occur due to different usage conditions, such as loading method, ambient temperature, and storage duration. All data and specifications are subject to change without notice. Our service team is happy to assist in reviewing the specific requirements of your individual application.

\*<sup>2</sup> Our service team is available to provide precise information about material compositions.

**Static load:** Resistance to pressure on a flat surface with an evenly distributed load at a room temperature of approx. 68 °F.

\*<sup>3</sup> **Dynamic load:** On a forklift with an evenly distributed load at a room temperature of approx. 68 °F.

**In racking system:** Evenly distributed load (sacks) along the longitudinal sides, resting on two supports for over 100 h at a room temperature of approx. 68°F.

CS3, 83222208, 02/2024, Nr.2