






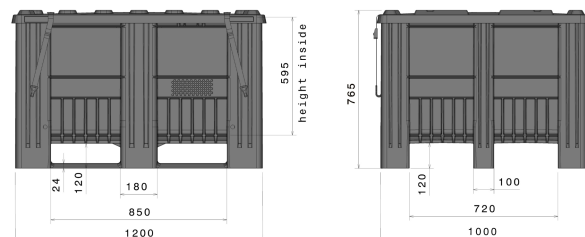


## CB3 UN 4H2

4H2/Y439/S/./D/BAM 15393-CR



Art.-Nr.: 83281809

Technical Data*1			
External Dimensions	47.2 x 39.4 x 29.1 " (with lid: 48.7 x 40.8 x 30.1 ")	Internal Dimensions	44.5 x 36.4 x 23.4 "
Weight(lbs)	96.6 lbs	Volume (l)	160 gal
Material*2	PE		
Load capacity (lbs)	 <b>Stacking Load</b> 11050 lbs	 <b>Holding Capacity</b> 950 lbs	 <b>Dynamic Load</b> 2650 lbs
Characteristics		Options	
Color: basalt gray		Transponder (RFID)	
Manufactured in one piece			
Runners: 3, unwelded			
With lid and 2 tensioning straps			
Stackable			
Temperature stability: -22°F to +104°F, briefly up to +194°F			
Resistant to most chemicals and cleaning agents			
Food-safe. HACCP compliant			
Container is based on DIN EN 13626 and DIN EN ISO 12048			
The design type complies with the test provisions of the international regulations for packagings for the transport of dangerous goods (packaging groups II and III)			
Loading quantities (Pcs / Approximate amount)			
 <b>Container</b>	Container 20': <b>37</b> Container 40': -	Container 40' High Cube: <b>100</b> Conventional trailer 45' high cube container: -	
 <b>Truck</b>	MEGA-Trailer: <b>122</b>	Jumbo: <b>132-142</b>	
Labelling			
Customized printing and numbering available on request depending on quantity. Position upon consultation.			



\*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

\*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

\*3 Stacking Load: With a maximum stacking height of 6 boxes (5 on 1 stacking) and evenly distributed load at approx. 20 °C.  
Dynamic Load: on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.

