
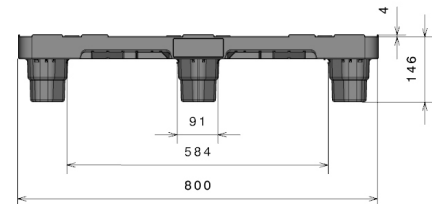


NP1

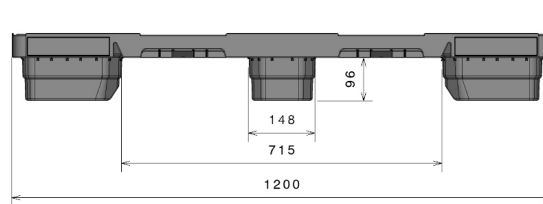


47.2" x 31.5"

Art.-Nr.: 83551201

Palgrip



Technical Data*1

Dimensions L x W x H	47.2 x 31.5 x 5.7" (1200 x 800 x 146 mm)		
Weight (lbs)	18.7 lbs		
Material*2	PE		
Load capacity (lbs)	 Static 5550 lbs	 Dynamic 2200 lbs	 In Racking System


Characteristics

Color: black
Runners: 9 feet
Lips: 0.16"
Antislip: Palgrip® Palgrip® deck
Temperature stability: -22°F to +104°F, briefly up to +194°F
Nesting Height: 2.1"

Options



Lip options
Transponder (RFID)
Reinforcement profiles
Lid

Loading quantities (Pcs / Approximate amount)

 Container	Container 20': 440 Container 40': 920	Container 40' High Cube: 989 Conventional trailer 45' high cube container: -
 Truck	MEGA-Trailer: 1419	Jumbo: 1634

Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.

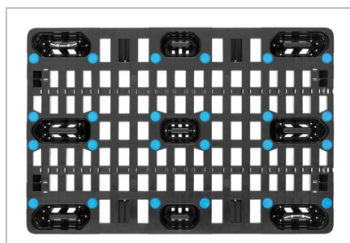

*1 All technical data reflect characteristic features tested under specially defined conditions. Variations may occur due to different usage conditions, such as loading method, ambient temperature, and storage duration. All data and specifications are subject to change without notice. Our service team is happy to assist in reviewing the specific requirements of your individual application.

*2 Our service team is available to provide precise information about material compositions.

*3 **Static load:** Resistance to pressure on a flat surface with an evenly distributed load at a room temperature of approx. 68°F.

Dynamic load: On a forklift with an evenly distributed load at a room temperature of approx. 68°F.

In racking system: Evenly distributed load (sacks) along the longitudinal sides, resting on two supports for over 100 h at a room temperature of approx. 68°F.