







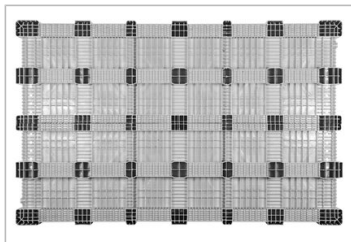
SB 790 gal UN 50H

50H/Y/.../D/BAM 16293-CTP/2630/1383

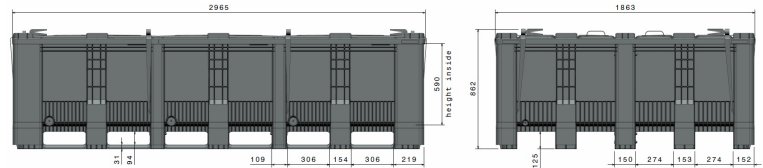

Art.-Nr.: 81941996

Technical Data* ¹					
External Dimensions	116.1 x 72.8 x 31.1 " (with lid: 116.7 x 73.3 x 33.9 ")		Internal Dimensions	113.0 × 69.7 × 23.2 "	
Weight (lbs)	390.2 lbs		Volume (l)	790 gal	
Material* ²	PE				
Load capacity (lbs)	 Stacking Load 3050 lbs	 Holding Capacity 3050 lbs	 Dynamic Load		
Characteristics			Options		
Color: light gray Runners: 5, unwelded Stackable Temperature stability: -22°F to +104°F, briefly up to +194°F Resistant to most chemicals and cleaning agents Food-safe. HACCP compliant Container is based on DIN EN 13626 and DIN EN ISO 12048 The design type complies with the test provisions of the international regulations for packagings for the transport of dangerous goods (packaging groups II and III)			Transponder (RFID)		
Loading quantities (Pcs / Approximate amount)					
 Container	Container 20': - Container 40': -		Container 40' High Cube: - Conventional trailer 45' high cube container: 8		
 Truck	MEGA-Trailer: 8		Jumbo: 8		
Labelling					
Customized printing and numbering available on request depending on quantity. Position upon consultation.					



*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.