






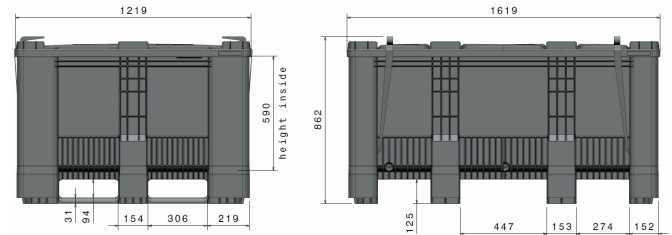


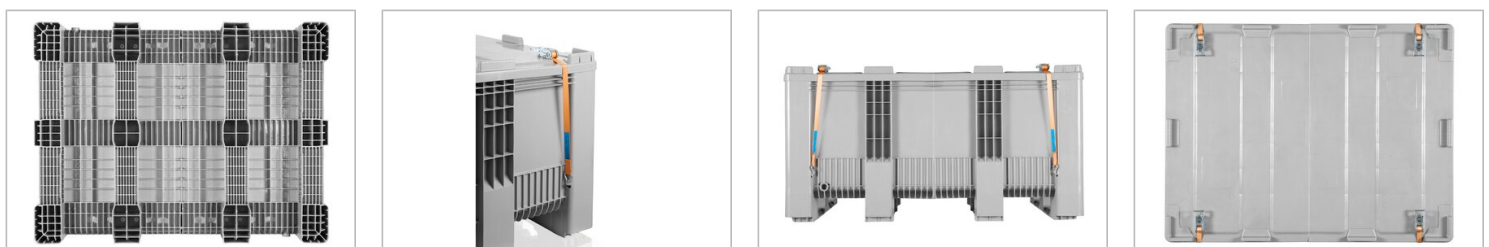
SB 265 gal UN 50H

50H/Y/.../D/BAM 16295-CPT/2560/1271



Art.-Nr.: 81941995

Technical Data*1					
External Dimensions	63.0 x 47.2 x 31.1 " (with lid: 63.7 x 48.0 x 33.9 ")		Internal Dimensions	59.8 × 44.1 × 23.2 "	
Weight (lbs)	162.1 lbs		Volume (l)	265 gal	
Material*2	PE				
Load capacity (lbs)	 Stacking Load 2800 lbs	 Holding Capacity 2800 lbs	 Dynamic Load		
Characteristics			Options		
Color: light gray			Transponder (RFID)		
Runners: 4, unwelded					
Stackable					
Temperature stability: -22°F to +104°F, briefly up to +194°F					
Resistant to most chemicals and cleaning agents					
Food-safe. HACCP compliant					
Container is based on DIN EN 13626 and DIN EN ISO 12048					
The design type complies with the test provisions of the international regulations for packagings for the transport of dangerous goods (packaging groups II and III)					
Loading quantities (Pcs / Approximate amount)					
 Container	Container 20': - Container 40': -		Container 40' High Cube: 32 Conventional trailer 45' high cube container: 32		
 Truck	MEGA-Trailer: 32		Jumbo: 32		
Labelling					
Customized printing and numbering available on request depending on quantity. Position upon consultation.					



*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.