





SB 265 gal UN 50H

50H/Y/++-/NL/2139-250603/2560/1271

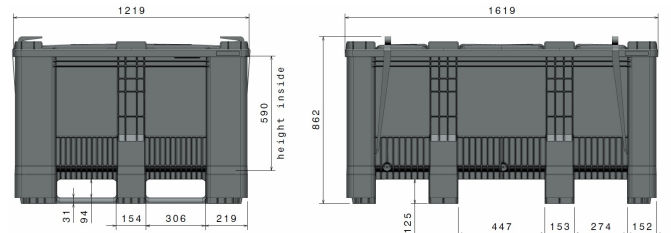

Art.-Nr.: 81941995

Technical Data*1

External Dimensions	63.0 x 47.2 x 31.1" (with lid: 63.7 x 48.0 x 33.9")	Internal Dimensions	59.8 x 44.1 x 23.2"
Weight (lbs)	162.1 lbs	Volume	265 gal
Material*2	PE		
Load capacity (lbs)	 Extra Load 2800 lbs	 Holding Capacity 2800 lbs	 Dynamic Load

Characteristics

Color: light gray
 Runners: 4, unwelded
 Stackable
 Temperature stability: -22°F to +104°F, briefly up to +194°F
 Resistant to most chemicals and cleaning agents
 Food-safe. HACCP compliant
 Container is based on DIN EN 13626 and DIN EN ISO 12048
 The design type complies with the test provisions of the international regulations for packagings for the transport of dangerous goods (packaging groups II and III)

Options



Transponder (RFID)

Loading quantities (Pcs / Approximate amount)

 Container	Container 20': -	Container 40' High Cube: 32
	Container 40': -	Conventional trailer 45' high cube container: 32
 Truck	MEGA-Trailer: 32	Jumbo: 32

Labelling

Customized printing and numbering available on request depending on quantity. Position upon consultation.

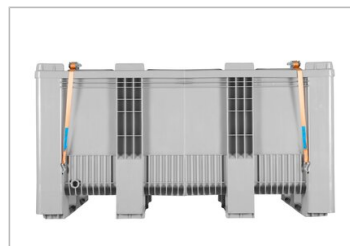

*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.