







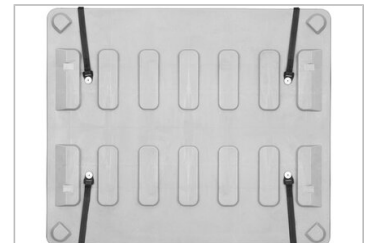
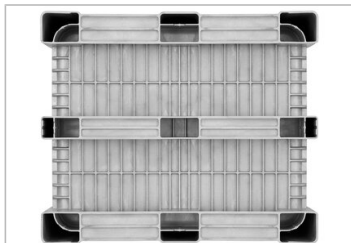
## CB3 UN 50H

50H/X/.../F/CRAEMER BVT 40512/2160/600

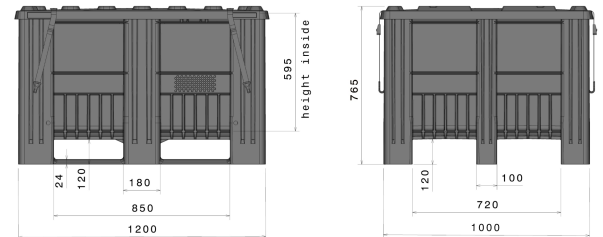

Art.-Nr.: 83289998

Technical Data* <sup>1</sup>			
External Dimensions	47.2 x 39.4 x 29.1 " (with lid: 48.7 x 32.9 x 30.1 ")	Internal Dimensions	44.5 x 36.4 x 23.4 "
Weight (lbs)	95.9 lbs	Volume (l)	160 gal
Material* <sup>2</sup>	PE		
Load capacity (lbs)	 <b>Stacking Load</b> 2650 lbs	 <b>Holding Capacity</b> 1300 lbs	 <b>Dynamic Load</b>
Characteristics		Options	
Color: light gray Manufactured in one piece Runners: 3, unwelded With lid and 2 tensioning straps Stackable Temperature stability: -22°F to +104°F, briefly up to +194°F Resistant to most chemicals and cleaning agents Food-safe. HACCP compliant Container is based on DIN EN 13626 and DIN EN ISO 12048 The design type complies with the test provisions of the international regulations for packagings for the transport of dangerous goods (packaging groups II and III)		Transponder (RFID)	
Loading quantities (Pcs / Approximate amount)			
On request			
Labelling			
Customized printing and numbering available on request depending on quantity. Position upon consultation.			



\*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

\*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.