







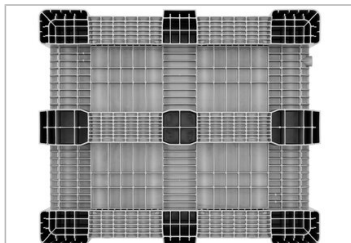
SB3 UN 50H

50H/X/.../F/CRAEMER BVT 40513/2160/600

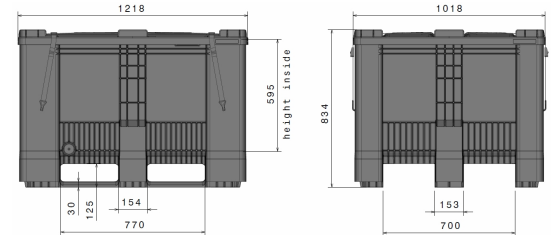

Art.-Nr.: 81941998

Technical Data* ¹						
External Dimensions	47.2 x 39.4 x 31.1 " (with lid: 48.0 x 40.1 x 32.8 ")		Internal Dimensions	44.2 × 35.9 × 23.2 "		
Weight (lbs)	113.5 lbs		Volume (l)	160 gal		
Material* ²	PE					
Load capacity (lbs)		Stacking Load 2650 lbs		Holding Capacity 1300 lbs		Dynamic Load
Characteristics			Options			
Color: light gray			Transponder (RFID)			
Manufactured in one piece						
Runners: 3, unwelded						
With lid and 2 tensioning straps						
Stackable						
Temperature stability: -22°F to +104°F, briefly up to +194°F						
Resistant to most chemicals and cleaning agents						
Food-safe. HACCP compliant						
Container is based on DIN EN 13626 and DIN EN ISO 12048						
The design type complies with the test provisions of the international regulations for packagings for the transport of dangerous goods (packaging groups II and III)						
Loading quantities (Pcs / Approximate amount)						
On request						
Labelling						
Customized printing and numbering available on request depending on quantity. Position upon consultation.						



^{*1} All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

^{*2} Our service team is pleased to be at your disposal if you require exact information about material compositions.