



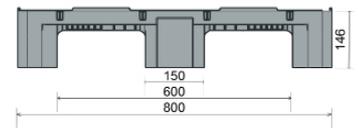

CS1

1200 x 800 mm

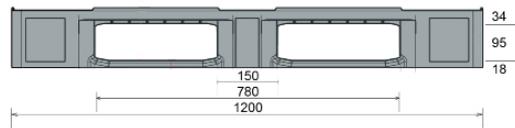

Art. no. 83199801

Technical data ^{*1}

Dimensions L x W x H (mm)	1200 x 800 x 146		
Weight (kg)	12.5		
Material ^{*3}	HDPE, Regranulated material		
Load capacity (kg) ^{*2}	 Static 5000	 Dynamic 1000	 In racking system 400

Characteristics

Colour: basalt grey
 Runners: 3, unwelded
 Rims: 7 mm
 Temperatur stability: -30 °C to +40 °C, briefly up to +90 °C

Options


Transponder
 Reinforcement profiles
 Rims
 Welded runner

Loading quantities (pcs/approx.)

 Container	Container 20': 215	Container 40' High Cube: 490
	Container 40': 440	Conventional trailer 45' high cube container: 544
 Truck	MEGA-Trailer: 646	Jumbo: 684 - 722

Labelling options

Customised printing and numbering available on request depending on quantity. Position upon consultation.

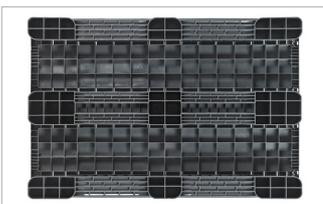

- ^{*1} All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. Our service team is pleased to be at your disposal to check the special requirements of your individual application.
- ^{*2} **Static load:** resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C.
Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.
In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20 °C.
- ^{*3} Although still within ISO compulsory range, the load-bearing test results using pallets made from regnanulated material show slightly more variation than those from virgin HDPE.