


CR3-5 ECO

48 x 40 inches



Art. no. 83302201

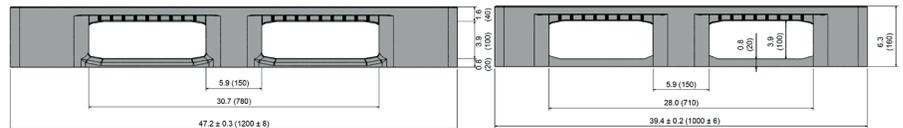

Please note: Drawing shows version without lips

Technical data ^{*1}

Dimensions in inches (L x W x H)^{*2} 47.2 x 39.4 x 6.3 (in mm: 1200 x 1000 x 160)

Weight in lbs^{*2} 56.0 (in kg: 27.0)

Material^{*3} HDPE, Regranulated material

Load capacity in lbs^{*4}



Static
16500 (in kg: 7500)



Dynamic
3300 (in kg: 1500)



In racking system
3100 (in kg: 1400)

Characteristics

Colour: black/light blue
Runners: 5, unwelded
Reinforcement rods: 5
Lips (height in inches): 0.2 (in mm: 5.0)
Antislip: Yes, 5 antislip strips
Temperature stability (in F): -22° to +104°, briefly up to +194°

Options

Transponder
Lip options

Loading quantities (pcs/approx.)




Container

Container 20': 141

Container 40' High Cube: 340

Labelling options

Customized printing and numbering available on request depending on quantity. Position upon consultation.

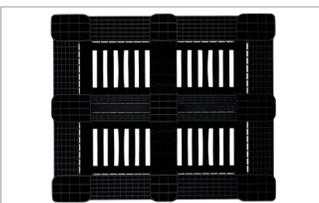

^{*1} All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

^{*2} All measurements and weight indications are conversion values derived from the original metric values. The possible range of tolerance can be found in the technical drawing. All tolerances are within the accepted tolerance range as specified in the respective DIN norm. If you require more information on our tolerances please contact our sales team.

^{*3} Our service team is pleased to be at your disposal if you require exact information about material compositions.

^{*4} Load capacity indications are conversion values derived from original metric values. Minor rounding differences are possible.

Static load: resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 68 °F (20 °C).

Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 68 °F (20 °C).

In racking system: evenly distributed load along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 68 °F (20 °C).

Craemer US Corporation

P.O. Box: 30725 US HWY 19 N #304

Palm Harbor, FL 34684

USA

Contact us:

Tel: +1 (727) 312 8859

E-Mail: usa_office@craemer.com

Web: www.craemer.com/usa

