







## CB3

1200 x 1000 x 740 mm / 610 l

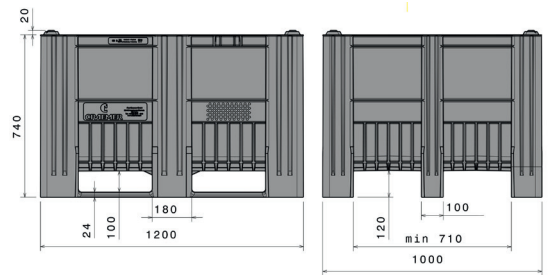

Art. no. 83281310

### Technical data <sup>\*1</sup>

External Dimensions L x W x H (mm)	1200 x 1000 x 740		
Weight (kg)	36.5		
Volume (l)	610		
Material*2	HDPE		
Load capacity (kg)*3	 <b>Stacking Load</b> 5000	 <b>Holding Capacity</b> 700	 <b>Dynamic Load</b> 1200



### Characteristics

Colour: blue  
 Manufactured in one piece  
 Runners: 3, unwelded  
 Stackable  
 Food-grade  
 Temperature stability: -30 °C to +40 °C, briefly up to +90 °C  
 Resistant to most chemicals and cleaning agents  
 Container corresponds to DIN EN 13626 and DIN EN ISO 12048

### Options


Transponder (RFID Technology)  
 Lid

### Loading quantities (pcs/approx.)

	<b>Container</b>	Container 20': <b>40</b> Container 40': —	Container 40' High Cube: <b>106</b> Conventional trailer 45' high cube container: <b>104</b>
		<b>Truck</b>	MEGA-Trailer: <b>130</b> Jumbo: <b>140-150</b>

### Labelling options

Customised printing and numbering available on request depending on quantity. Position upon consultation.

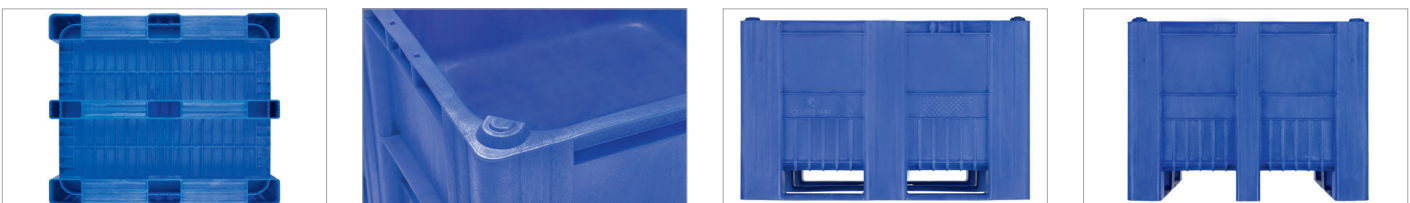

\*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

\*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

\*3 **Stacking Load:** With a maximum stacking height of 6 boxes (5 on 1 stacking) and evenly distributed load at approx. 20 °C.  
**Dynamic Load:** on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.