


# CR1 ECO

1200 x 800 mm



**Palgrip**

Art. no. 83232230

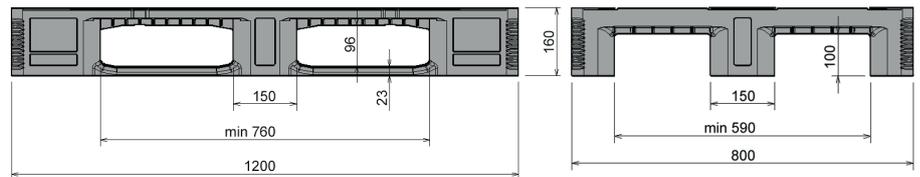

## Technical data \*1

Dimensions L x W x H (mm)	1200 x 800 x 160
Weight (kg)	19.0
Material*2	HDPE, Regranulated material
Load capacity (kg)*3	



**Static**  
7500



**Dynamic**  
1750



**In racking system**  
1750

## Characteristics

Colour: black / light blue  
Runners: 3, unwelded  
Reinforcement profiles: 3  
Antislip: Yes, 3 Palgrip® anti-slip strips on the top deck  
Temperature stability: -30 °C to +40 °C, briefly up to +90 °C  
Manufactured from regnanulated material of one single type

## Options


Transponder  
Rim options

## Loading quantities (pcs/approx.)

	<b>Container</b>	Container 20': <b>192</b> Container 40': <b>390</b>	Container 40' High Cube: <b>440</b> Conventional trailer 45' high cube container: <b>510</b>
		<b>Truck</b>	MEGA-Trailer: <b>612</b> Jumbo: <b>684</b>

## Labelling options

Customised printing and numbering available on request depending on quantity. Position upon consultation.



\*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

\*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

\*3 **Static load:** resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C.

**Dynamic load:** on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.

**In racking system:** evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20°C.