

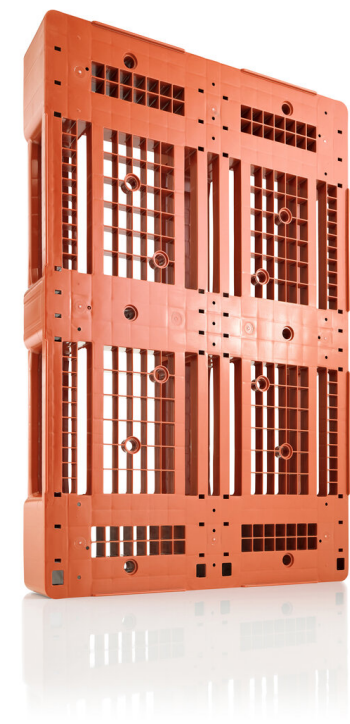


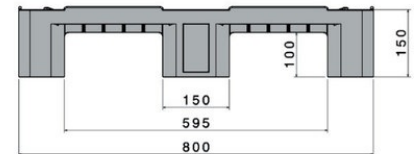

D1

1200 x 800 mm

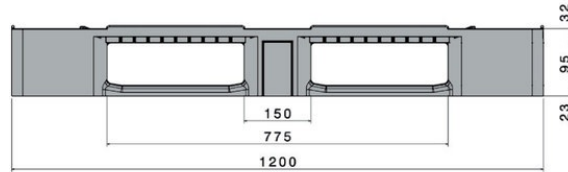


Art.-Nr.: 83360731

Technical data

Dimensions L x W x H (mm)	1200 x 800 x 150
Weight (kg)	14.5 kg
Material	PE

Load capacity (kg)



Characteristics

Colour: redbrown
Runners: 3, unwelded
Reinforcement profiles: 3
Rims: 7 mm
Temperature stability: -30 °C to +40 °C, briefly up to +90 °C

Options


Transponder (RFID)
Reinforcement profiles
Rim options
Antislip

Loading quantities (Pcs / Approximate amount)

 Container	Container 20': 215 Container 40': 440	Container 40' High Cube: 465 Conventional trailer 45' high cube container: 528
	 Truck	MEGA-Trailer: 646 Jumbo: 722

Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.



*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

*3 **Static load:** resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C.

Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.

In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20 °C.