






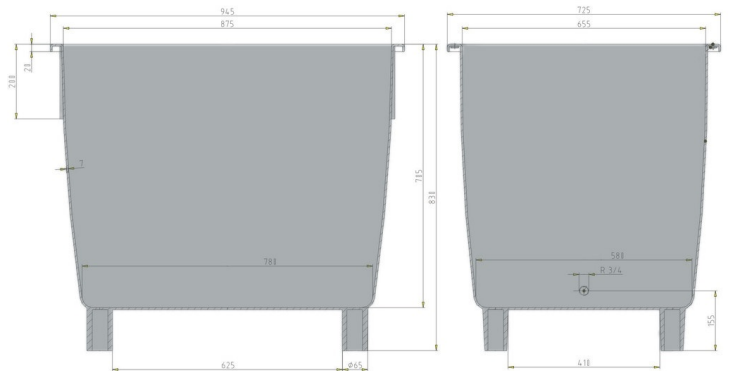

## Universal container / Grit bin

400 l



Art.-Nr.: 81015850

Technical data	
External Dimensions (mm)	945 x 725 x 830 / with lid 930 mm
Weight (kg)	21.0 kg
Volume (l)	400 l
Material* <sup>2</sup>	PE
Load capacity (kg)* <sup>3</sup>	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  <b>Holding Capacity</b> 400 kg         </div> <div style="text-align: center;">  <b>Extra Load</b> 645 kg         </div> </div>
Stacking height (mm)	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  <b>When nested</b> 198 mm         </div> <div style="text-align: center;">  <b>When stacked</b> 660 mm         </div> </div>
Characteristics	Options
Colour: basalt grey 4 feet, galvanised bars Nestable, stackable with lid For temperatures ranging from -30 °C to +40 °C, briefly up to +90 °C Accessible with forklift and lift truck Overhanging lid edge to prevent water ingress Turn lock or locking device (Padlock in addition to locking device possible)	-
Loading quantities (Pcs / Approximate amount)	
On request	
Labelling	
Customised printing and numbering available on request depending on quantity. Position upon consultation.	



\*<sup>1</sup> All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

\*<sup>2</sup> Our service team is pleased to be at your disposal if you require exact information about material compositions.

\*<sup>3</sup> **Stacking Load:** With a maximum stacking height of 6 boxes (5 on 1 stacking) and evenly distributed load at approx. 20 °C.  
**Dynamic Load:** On a forklift with an evenly distributed load at a room temperature of approx. 20 °C.