



SB3 perforated

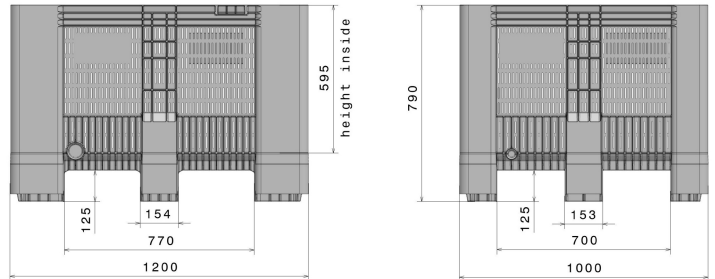


1200 x 1000 x 790 mm / 610 l

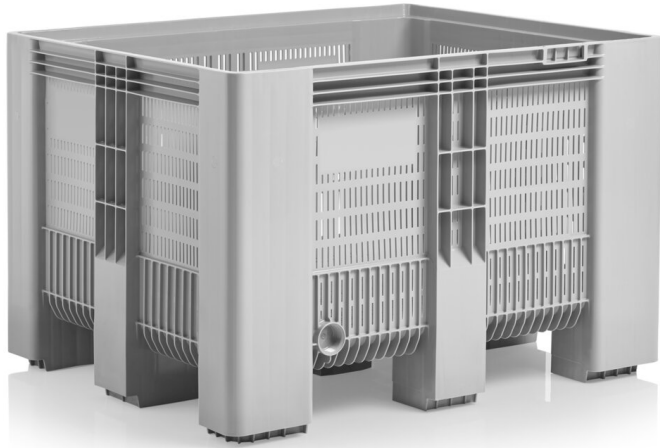

Art.-Nr.: 81940891

Technical data

Dimensions L x W x H (mm)	1200 x 1000 x 790
Weight (kg)	38.5 kg
Volume (l)	610 l
Material*2	PE

Load capacity (kg)*3	 Stacking Load 5000 kg	 Holding Capacity 700 kg	 Dynamic Load 1200 kg
----------------------	--	--	---



Characteristics

Colour: light grey
 Manufactured in one piece
 Runners: 9 feet
 Stackable
 Temperature stability: -30°C to +40°C, briefly up to +90°C
 Resistant to most chemicals and cleaning agents
 Food-safe. HACCP compliant
 Container is based on DIN EN 13626 and DIN EN ISO 12048

Options



Drain port
 Solid walls / base
 3 Runners

Loading quantities (Pcs / Approximate amount)

 Container	Container 20': 30 Container 40': -	Container 40' High Cube: 84 Conventional trailer 45' high cube container: 104
 Truck	MEGA-Trailer: 130	Jumbo: 140-150

Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.



*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

*3 **Stacking Load:** With a maximum stacking height of 6 boxes (5 on 1 stacking) and evenly distributed load at approx. 20 °C.
Dynamic Load: On a forklift with an evenly distributed load at a room temperature of approx. 20 °C.