





CB1 UN 11H2

11H2/X/.../F/CRAEMER BVT 40511/1800 500

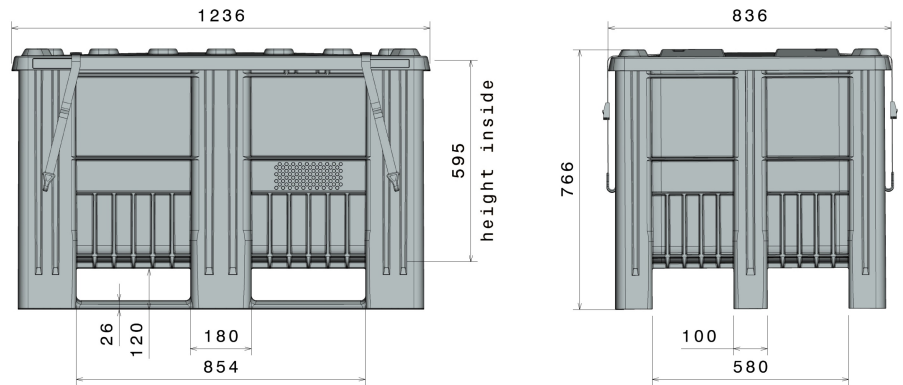

Art.-Nr.: 83389999

Technical Data*1			
External Dimensions (mm)	1200 x 800 x 740 mm (with lid: 1236 x 836 x 766 mm)	Internal Dimensions (mm)	1115 x 715 x 595 mm
Weight (kg)	40.0 kg	Volume (l)	470 l
Material*2	PE		

Load capacity (kg)	 Extra Load 1000kg	 Holding Capacity 500kg	 Dynamic Load
--------------------	---	--	---

Characteristics	Options
<p>Colour: light grey</p> <p>Manufactured in one piece</p> <p>Runners: 3, unwelded</p> <p>With lid and 2 tensioning straps</p> <p>Stackable</p> <p>Temperature stability: -30 °C to +40 °C, briefly up to +90 °C</p> <p>Resistant to most chemicals and cleaning agents</p> <p>Food-safe. HACCP compliant</p> <p>Container is based on DIN EN 13626 and DIN EN ISO 12048</p> <p>The design type complies with the test provisions of the international regulations for packagings for the transport of dangerous goods (packaging groups II and III)</p>	<p>Transponder (RFID)</p>

Loading quantities (Pcs / Approximate amount)

On request

Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.



*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application. Periodic Inspection (Operator Responsibility): In accordance with ADR 6.5.4.4.1 (b), this type (11H2) must undergo a mandatory inspection at intervals not exceeding 30 months. This includes an assessment of the external condition and the proper functioning of service equipment.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.