




## CB1 UN 4H2

4H2/Y438/S/../D/BAM 15814-CR

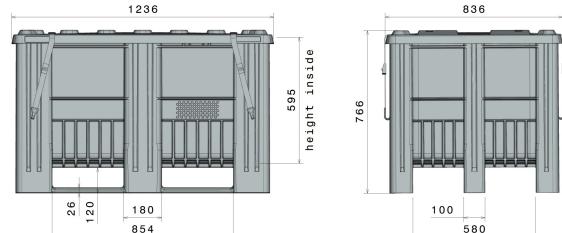

Art.-Nr.: 83381319

### Technical Data\*<sup>1</sup>

External Dimensions	47.2 x 31.5 x 29.1" (with lid: 48.7 x 32.9 x 30.1")	Internal Dimensions	43.9 x 28.1 x 23.4"
Weight (lbs)	87.7 lbs	Volume	125 gal
Material* <sup>2</sup>	PE		
Load capacity (lbs)	<b>Stacking Load</b> 1406kg	<b>Holding Capacity</b> 1000 lbs	<b>Dynamic Load</b>

### Characteristics

Color: blue  
 Manufactured in one piece  
 Runners: 3, unwelded  
 With lid and 2 tensioning straps  
 Stackable  
 Temperature stability: -22°F to +104°F, briefly up to +194°F  
 Resistant to most chemicals and cleaning agents  
 Food-safe. HACCP compliant  
 Container is based on DIN EN 13626 and DIN EN ISO 12048  
 The design type complies with the test provisions of the international regulations for packagings for the transport of dangerous goods (packaging groups II and III)

### Options

Transponder (RFID)

### Loading quantities (Pcs / Approximate amount)

<b>Container</b>	Container 20': <b>31</b> Container 40': -	Container 40' High Cube: <b>72</b> Conventional trailer 45' high cube container: -
<b>Truck</b>	MEGA-Trailer: <b>95</b>	Jumbo: <b>110</b>

### Labelling

Customized printing and numbering available on request depending on quantity. Position upon consultation.



\*<sup>1</sup> All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

\*<sup>2</sup> Our service team is pleased to be at your disposal if you require exact information about material compositions.