




# CB1

47.2 x 31.5 x 29.1" / 124 gal

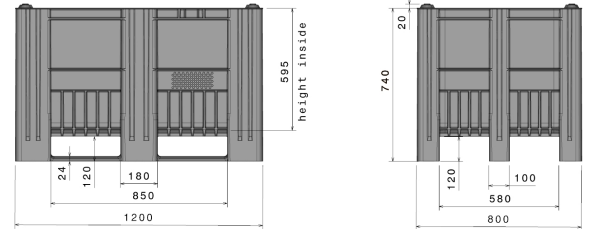

Art.-Nr.: 83381310

### Technical Data\*1

External Dimensions	47.2 x 31.5 x 29.1" (1200 x 800 x 740 mm)	Internal Dimensions	43.9 x 28.1 x 23.4" (1115 x 715 x 595 mm)
Weight (lbs)	76.1 lbs	Volume	125 gal
Material*2	PE		

Load capacity (lbs)	 <b>Extra Load</b> 11000 lbs	 <b>Holding Capacity</b> 1550 lbs	 <b>Dynamic Load</b> 2650 lbs
---------------------	--	---	---

### Characteristics

Color: blue  
 Manufactured in one piece  
 Runners: 3, unwelded  
 Stackable  
 Temperature stability: -22°F to +104°F, briefly up to +194°F  
 Resistant to most chemicals and cleaning agents  
 Food-safe. HACCP compliant  
 Container is based on DIN EN 13626 and DIN EN ISO 12048

### Options


Transponder (RFID)  
 Lid

### Loading quantities (Pcs / Approximate amount)

 <b>Container</b>	Container 20': <b>33</b> Container 40': -	Container 40' High Cube: <b>75</b> Conventional trailer 45' high cube container: <b>99</b>
 <b>Truck</b>	MEGA-Trailer: <b>99</b>	Jumbo: <b>114</b>

### Labelling

Customized printing and numbering available on request depending on quantity. Position upon consultation.

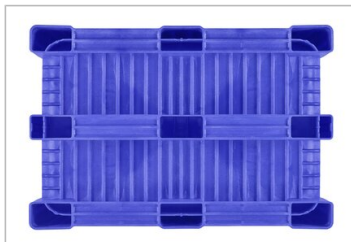

\*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.  
 \*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.  
 \*3 Extra Load: With a maximum stacking height of 6 boxes (5 on 1 stacking) and evenly distributed load at approx. 68°F.  
 Dynamic Load: on a forklift with an evenly distributed load at a room temperature of approx. 68°F.